
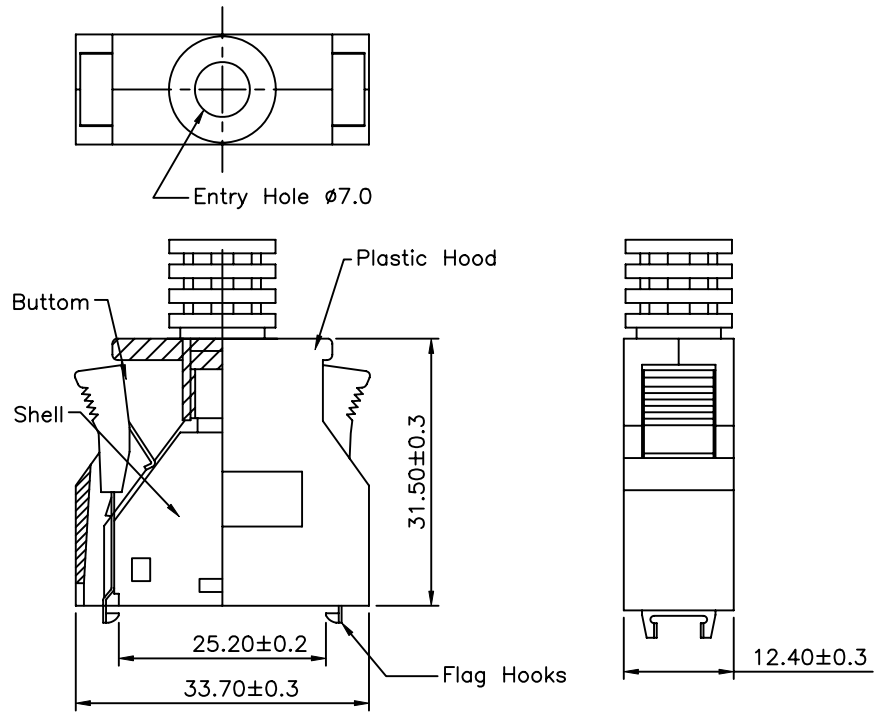


SPECIFICATION

Current Rating:1 Amp
 Insulation Resistance:500 Megohms Min.
 Withstanding Voltage:500V AC/Minute
 Contact Resistance:35 Milliohms Max.
 Temperature Range:-55°C To +105°C
 Housing And Cover:Plastic Thermoplastic
 P.B.T UL 94V-0,Black
 Contact:Phosphor Bronze Selective Gold Plated
 Front Shell:Steel,Nickel Plated Over Copper
 Plastic Hood With Spring Latches
 Steel Inner Shell
 Full EMI/RFI Shielded
 Hood:Plastic ABS
 Inner Shell:Steel,Nickel Plated
 Latch:Stainless Steel
 RoHS Compliant

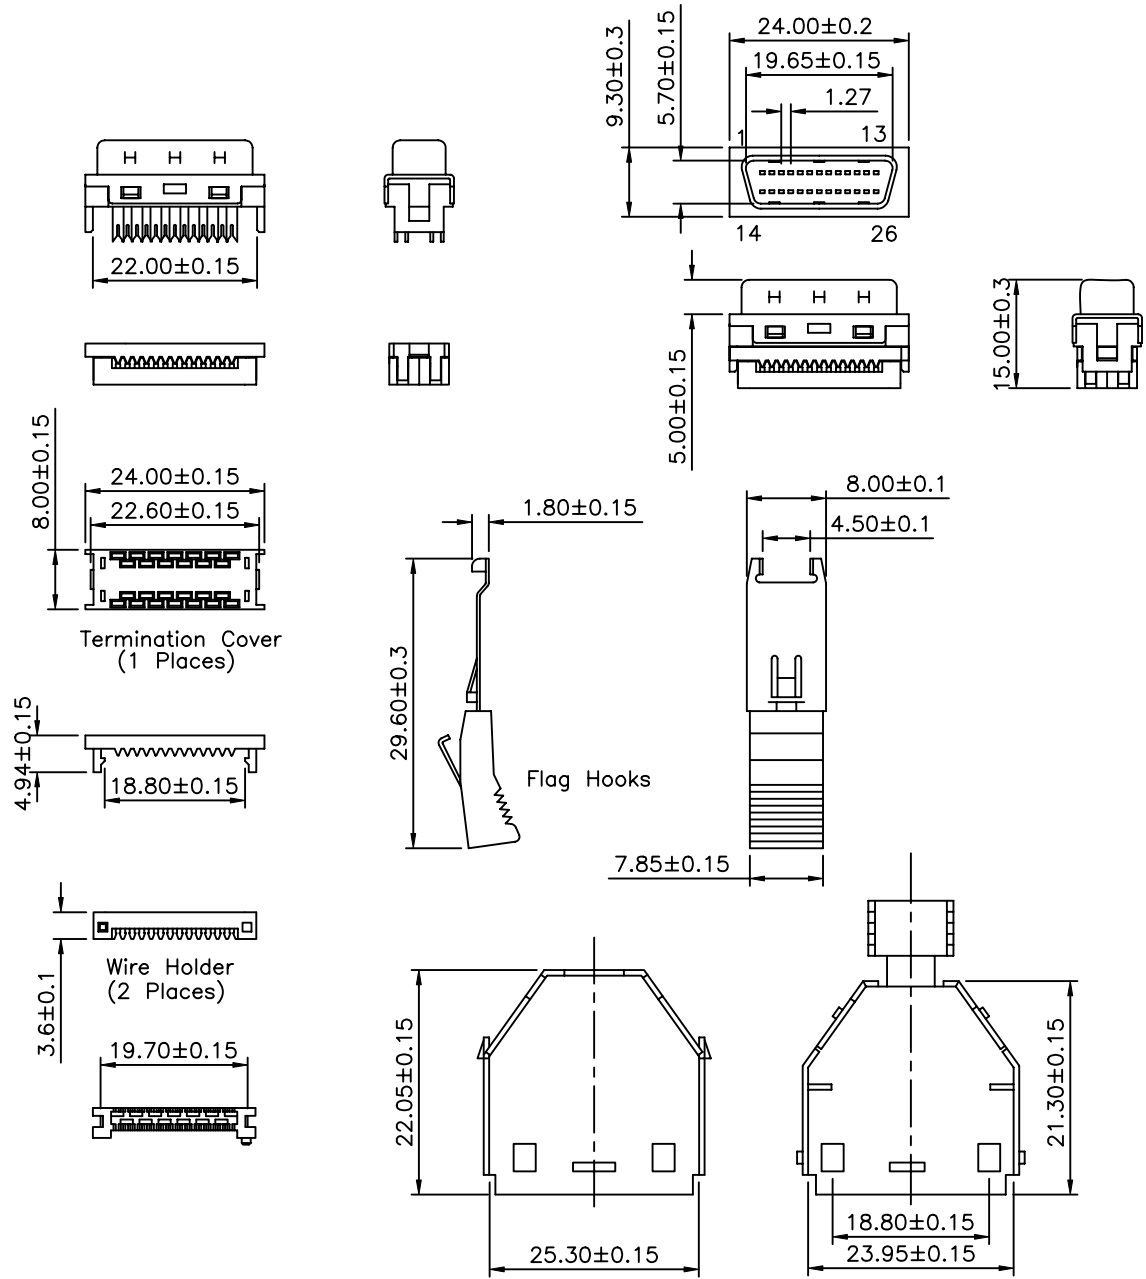

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10444

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

.XXX


SCALE

NONE

REV.

A0

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

04/06/2008