
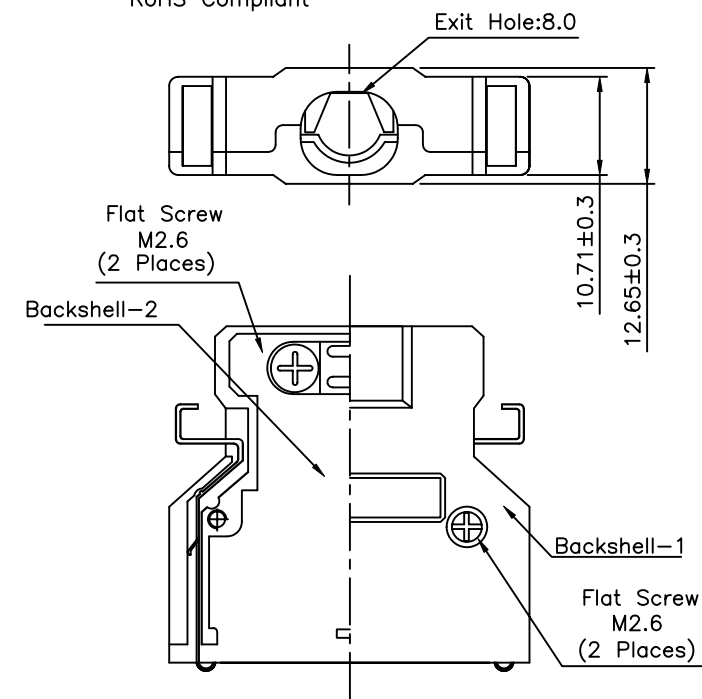


SPECIFICATION

Current Rating:1 Amp
Insulation Resistance:500 Megohms Min.
Withstanding Voltage:500V AC/Minute
Contact Resistance:35 Milliohms Max.
Temperature Range:-55°C To +105°C
Housing And Cover:Plastic Thermoplasitic
P.B.T UL 94V-0,Black
Contact:Phosphor Bronze Selective Gold Plated
Front Shell:Steel,Nickel Plated Over Copper
Round Cable Straight Exit
Strain Relief Staple With Spring Latches
Excellent EMI/RFI Protection
Backshell:Zinc,Nickel Plated Over Copper
Spring Latches: Stainless Steel
Screw:Steel,Nickel Plated Over Copper
Cable Clipper:Steel,Nickel Plated
RoHS Compliant

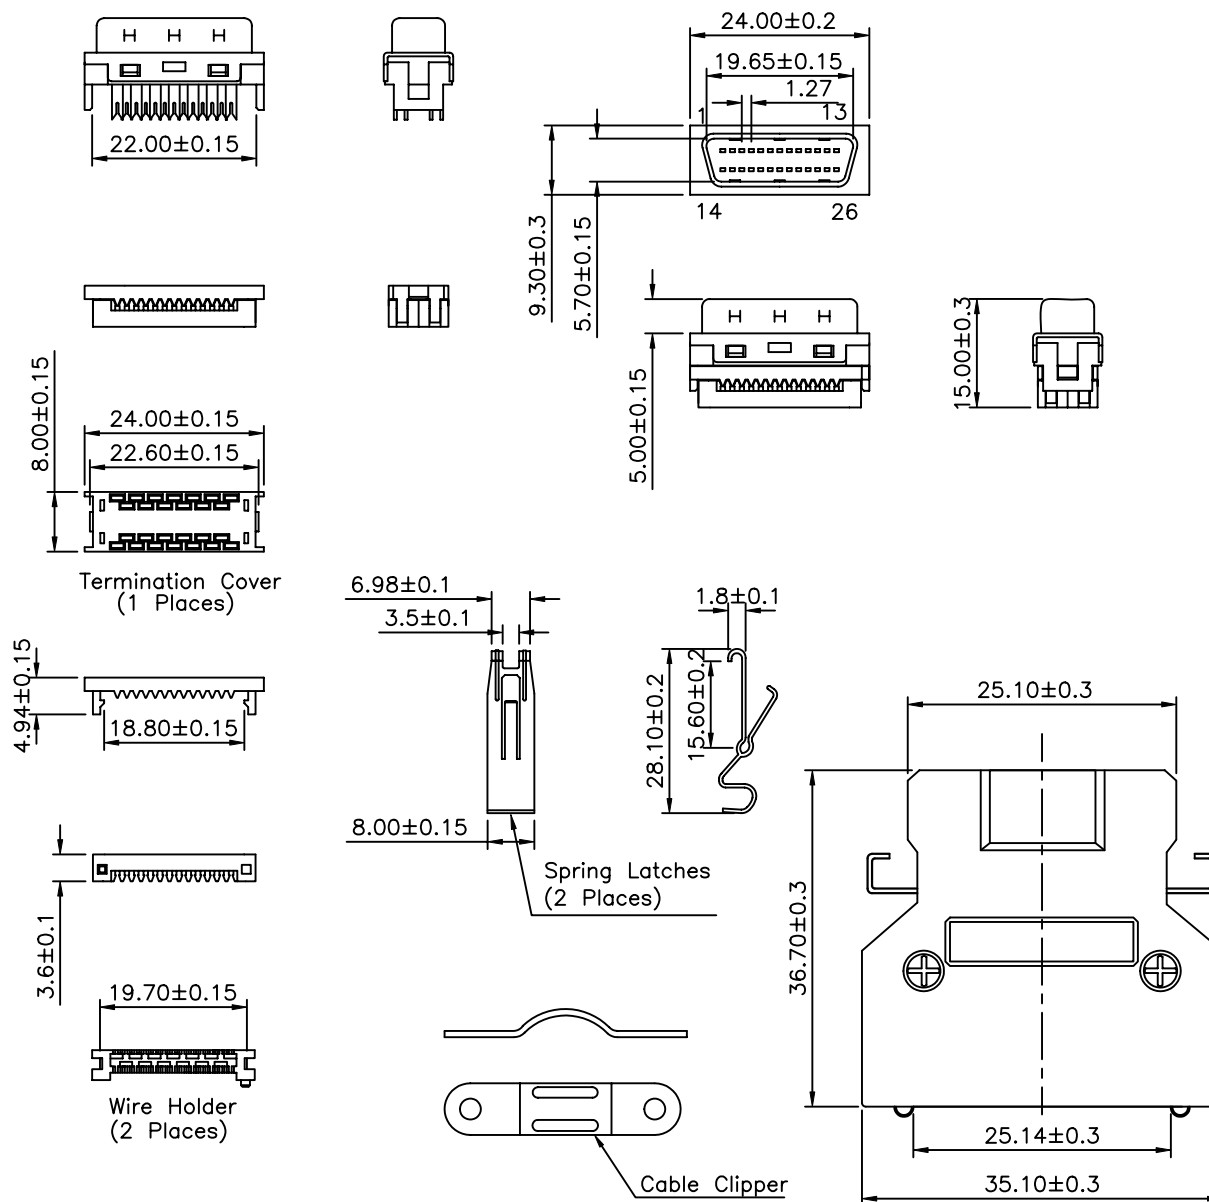

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10445

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


PEGA

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.38
----	------------

.XX	±0.25
-----	-------

.xxx



△	A0
NO.	REV.

NEW RELEASE

REVISIONS

	HZF
--	-----

	CH
--	----

	03/30/2008
--	------------

	DATE
--	------