
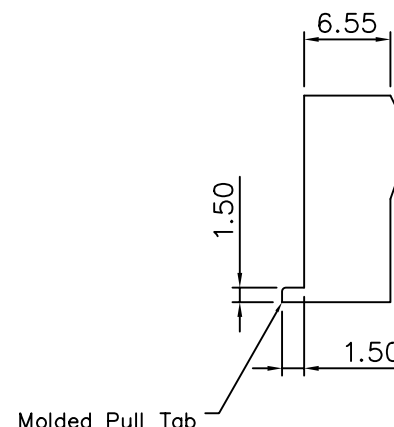
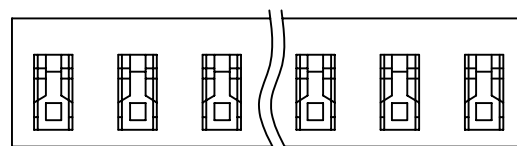
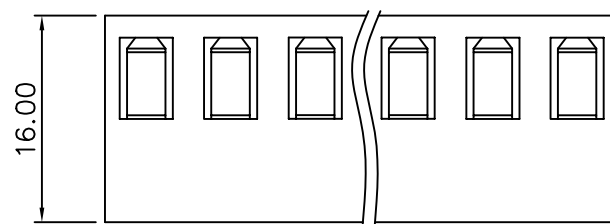


# SPECIFICATIONS

Current Rating: 7A Max.  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 1000V AC/Minute  
 Insulation Resistance: 1000Megohms Min.  
 Temperature Range: -40°C To +105°C  
 (Including Temp.Rise)  
 Insulator: Nylon 66, UL94V-2

| Circuits | Dim A | Dim B |
|----------|-------|-------|
| 2        | 5.08  | 10.33 |
| 3        | 10.16 | 15.41 |
| 4        | 15.24 | 20.49 |
| 5        | 20.32 | 25.57 |
| 6        | 25.40 | 30.65 |
| 7        | 30.48 | 35.73 |
| 8        | 35.56 | 40.81 |
| 9        | 40.64 | 45.89 |
| 10       | 45.72 | 50.97 |
| 11       | 50.80 | 56.05 |
| 12       | 55.88 | 61.13 |

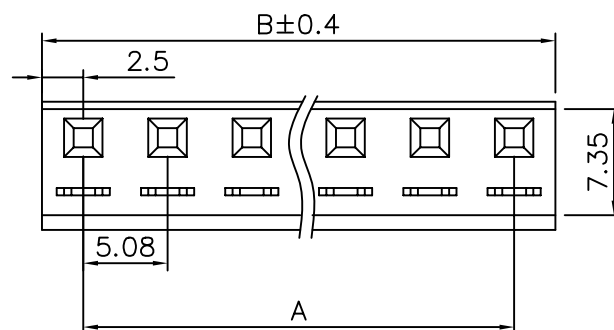

Molded Pull Tab

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 10490

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.40  
 .XX ±0.25  
 .XXX ±0.08

SCALE NONE

REV. A0

UNIT mm

NO. REV.

NEW RELEASE  
 REVISIONS

MEI  
 CHK DATE