File No.	259	SHEET	1 / 1



Detail:K



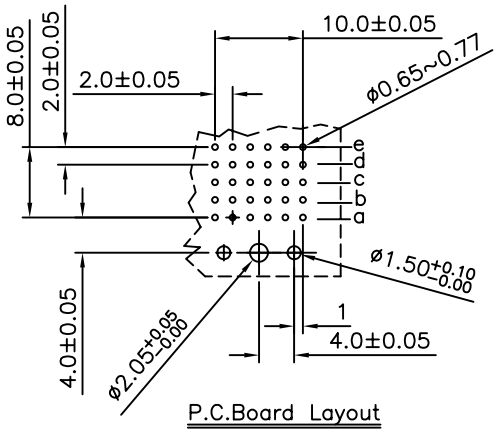

P.C.Board Layout

SPECIFICATIONS

Current Rating: 3 Amp
Contact Resistance: 30 Milliohms Max.
Insulator Resistance: 1000 Megohms Min.
Dielectric Withstanding Voltage: AC 1000V For 1 Minute
Operating Temperature: −65°C ~ +125°C
Housing: Liquid Crystal Polymer(LCP) UL94V−0
Contacts: Phosphor Bronze





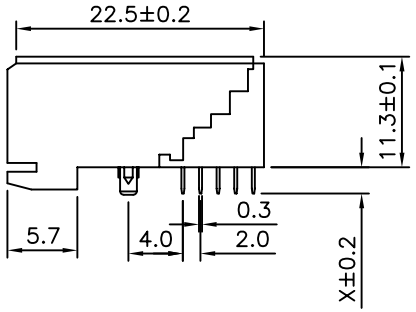



Detaia:J



X Length	10574	10575
	2.90	3.53

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
10574	CHECKED BY	HZF	X. ±0.5
	DRAWING BY	PEGA	.X ±0.25
			.XX ±0.13
SCALE NONE	REV.	B0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	B0	NEW RELEASE	HZF	09/30/2006