

File No.	689PC05801	SHEET	1/1

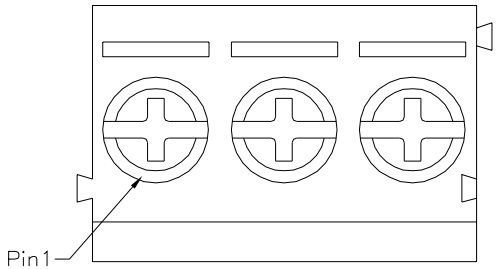


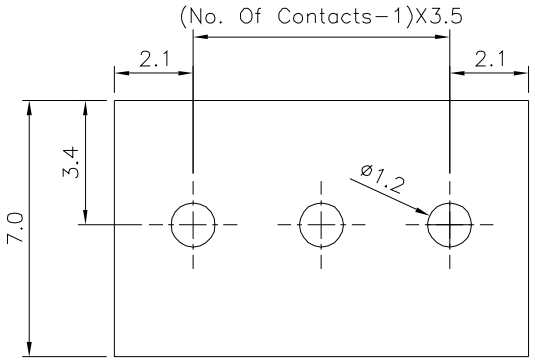


Recommended P.C.B. Layout

⚠1 SPECIFICATION

Current Rating: 10A/Way Max.
Voltage Rating: 150V AC
Withstanding Voltage: 2000V AC/Minute
Contact Resistance: 20 Milliohms Max.
Wire Range: 16~30 AWG
Torque: 2.0kgf.cm/M2
Operating Temperature: −40°C~+105°C
Terminal: Copper Alloy,Tin Plated
Screw: Steel,Galvanized And With Cr3+ Plated
Wire Guard: Stainless Steel
Insulator: Polyamide(UL94V−0),Blue
RoHS Compliant

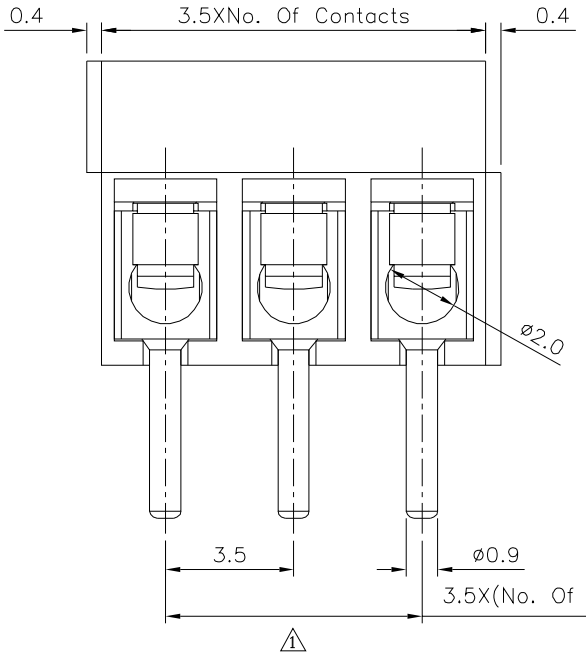

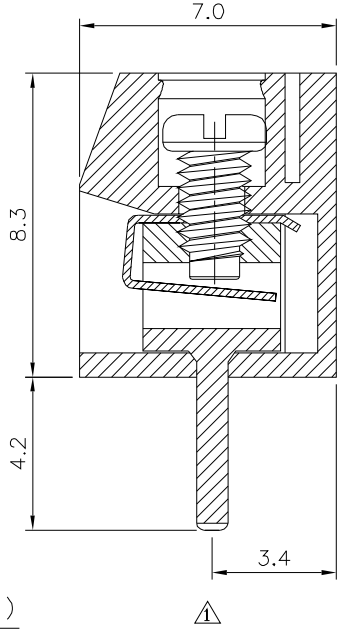

4UCON	元化興業股份有限公司 4UCON TECHNOLOGY INC.	DRAWING No.	10688
		APPROVED BY	EMILY
		CHECKED BY	HZF
		DRAWING BY	WSS
		SCALE	NONE
		REV.	B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	B1	Modify Data	HZF	03/05/2025
⚠0	B0	NEW RELEASE	HZF	10/26/2014