


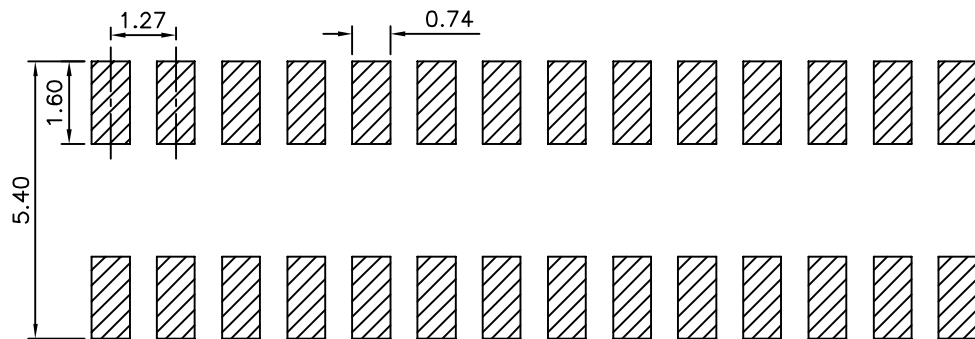


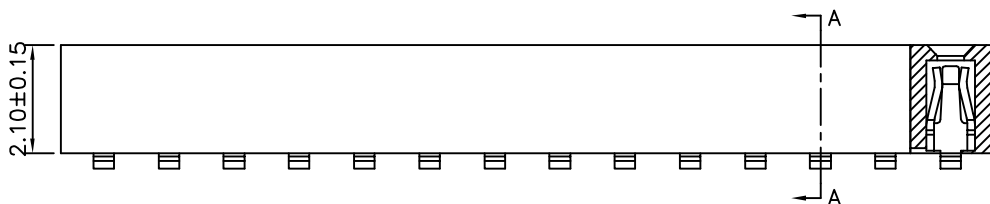

Recommended P.C.B Layout(Top Side)  
(PCB Board Tolerance:±0.05)

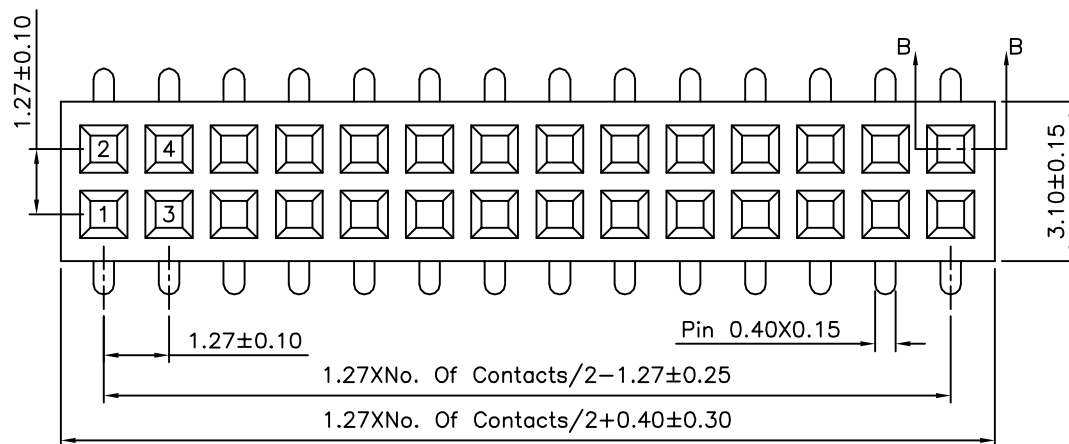

Section B-B



Section A-A

### △ SPECIFICATION

Current Rating:1.0 Amp  
Withstand Voltage:500V AC/DC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Contact:Phosphor Bronze,Gold Plated Over Nickel  
△ Insulator:PA9T+30%G.F.(UL94V-0),Black  
RoHS Compliant

**4UCON**

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10819

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A4

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
△ .X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG. ±3°

UNIT  
mm



|          |              |       |            |
|----------|--------------|-------|------------|
| △ A4     | Modify Data  | HZF   | 11/11/2013 |
| △ A3     | Modify Spec. | HZF   | 02/26/2013 |
| △ A2     | Add P/N Code | HZF   | 07/17/2012 |
| △ A1     | Modify Data  | HZF   | 03/18/2010 |
| △ A0     | NEW RELEASE  | BECKY | 03/25/2005 |
| NO. REV. | REVISIONS    | CHK   | DATE       |