
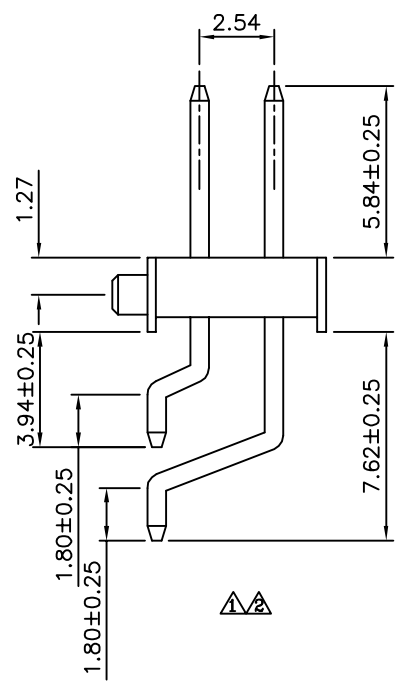


△ SPECIFICATION
 Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 No. Of Contacts:06~80 Contacts
 RoHS Compliant

Recommended P.C.B. Layout

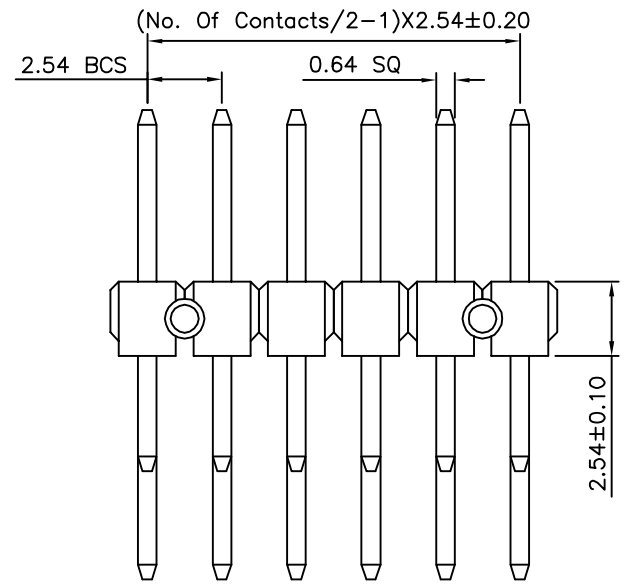

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5° |
| 10997 | | EMILY | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | |
| | | WSS | | |
| SCALE | NONE | REV. | A2 | UNIT |
| | | | | mm |

| | | | | |
|-----|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △A2 | | Modify Data | HZF | 06/10/2011 |
| △A1 | | Modify Data | HZF | 09/10/2010 |
| △A0 | | NEW RELEASE | HZF | 09/15/2006 |