
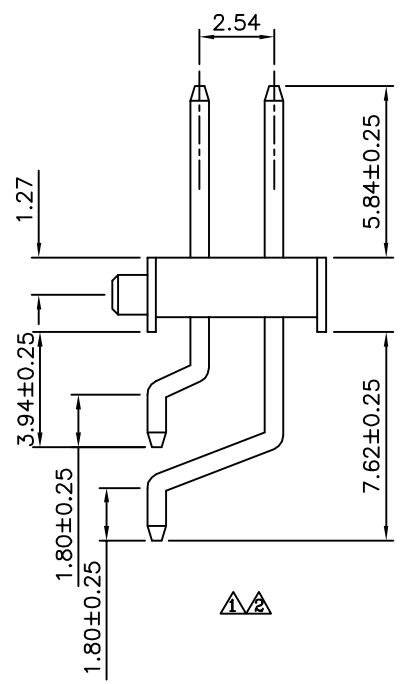


Recommended P.C.B. Layout

**△ SPECIFICATION**  
 Current: 3A  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: 1000V AC RMS  
 Operation Temperature: -55°C ~ +105°C  
 Housing: PA6T(UL94V-0), Black  
 Contact: Copper Alloy, Gold Flash  
 No. Of Contacts: 06 ~ 80 Contacts  
 RoHS Compliant

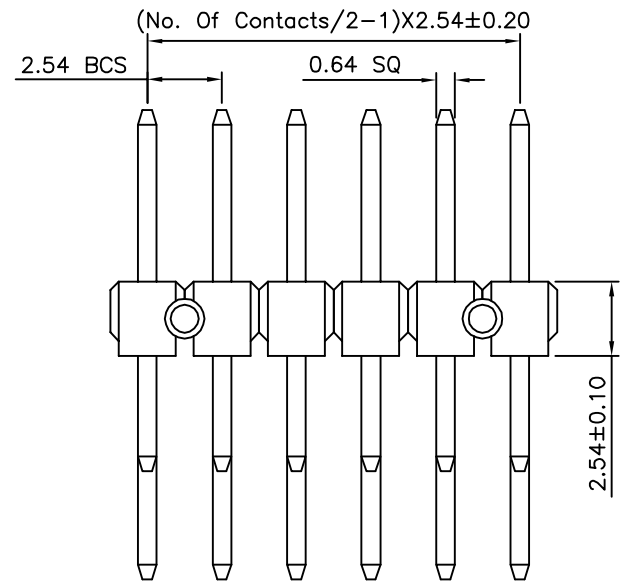

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
11013		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		WSS		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	06/10/2011
△A1		Modify Data	HZF	09/10/2010
△A0		NEW RELEASE	HZF	09/15/2006