
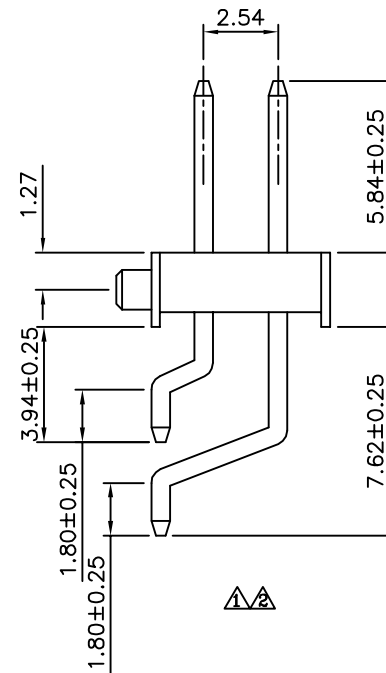


Recommended P.C.B. Layout

△ SPECIFICATION

Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 No. Of Contacts:06~80 Contacts
 RoHS Compliant

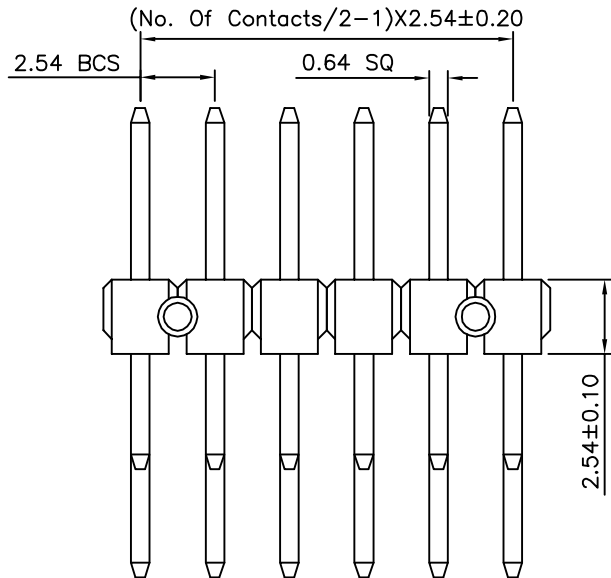

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 11023

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 WSS

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

SCALE NONE REV. A2

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	06/10/2011
△A1		Modify Data	HZF	09/10/2010
△A0		NEW RELEASE	HZF	09/15/2006