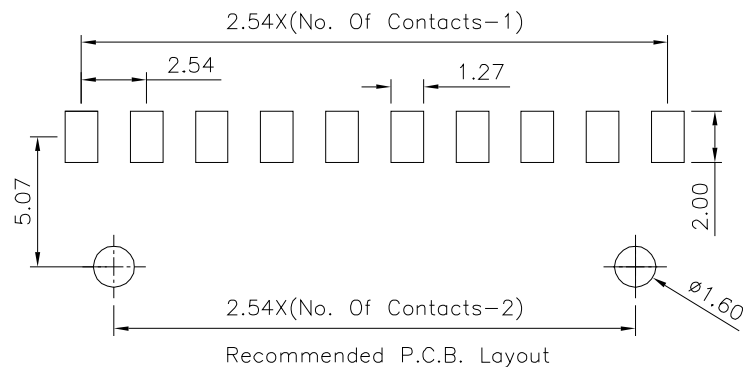


SPECIFICATION

Current:3A

Withstanding Voltage:1000V AC/Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.



Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Insulator:PA6T(UL94V-0),Black

Contact: Brass, Gold Flash Over Nickel

No. Of Contacts:02~40 Contacts

RoHS Compliant

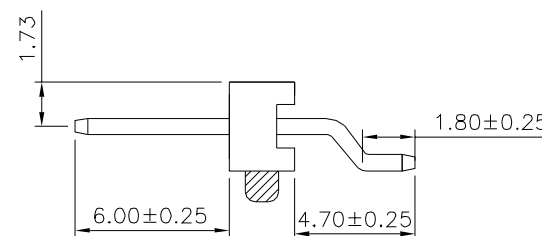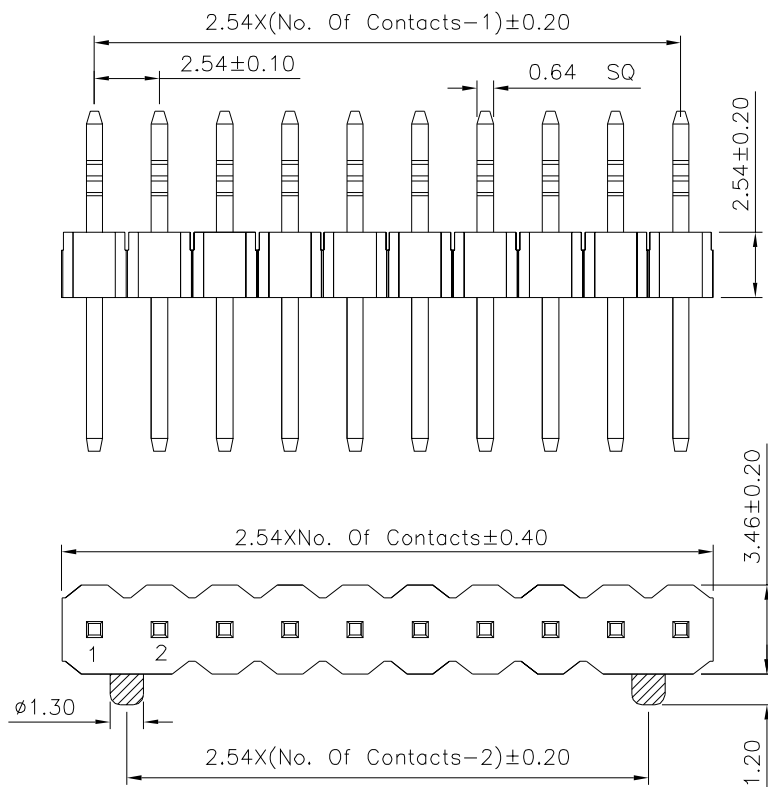

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11039

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$$.X \pm 0.38$$

.XX ± 0.25

.XXX ± 0.05

	UNIT mm
--	------------



BO	
NO. REV.	

	NEW RELEASE
--	-------------

REVISIONS

HZF

02/13/2025

CHK

DATE