
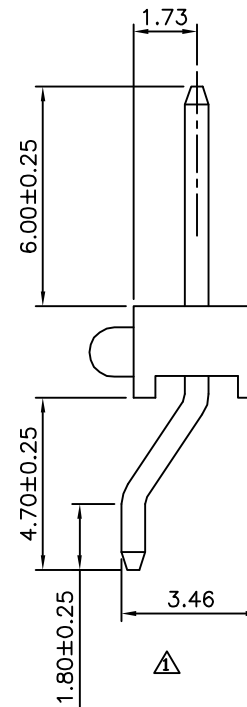
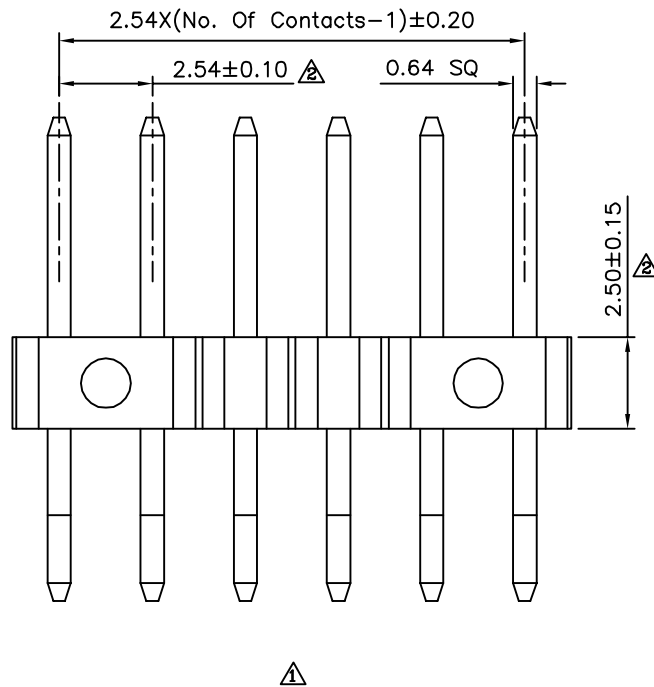
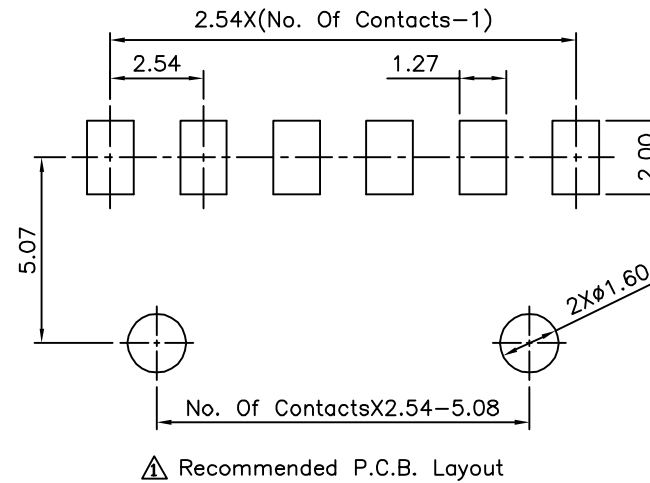


△ SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 △ Contact:Copper Alloy,Gold Flash Over Nickel
 No. Of Contacts:03~40 Contacts
 RoHS Compliant

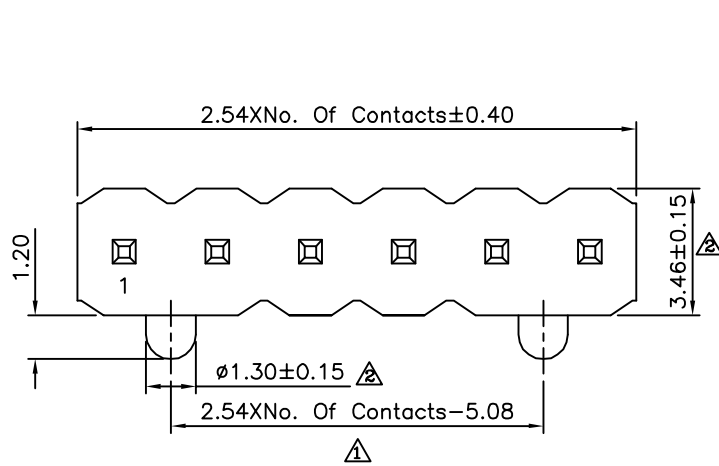

DRAWING No. 11049		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°							
		CHECKED BY HZF				⚠ A2	Modify Data		HZF	11/22/2012	
		DRAWING BY SONG				⚠ A1	Modify Data		HZF	12/13/2010	
		SCALE NONE				⚠ A0	NEW RELEASE		HZF	09/27/2006	
REV.	A2	UNIT mm		NO. REV.	REVISIONS				CHK	DATE	

4UCON元化興業股份有限公司
 4UCON TECHNOLOGY INC.