
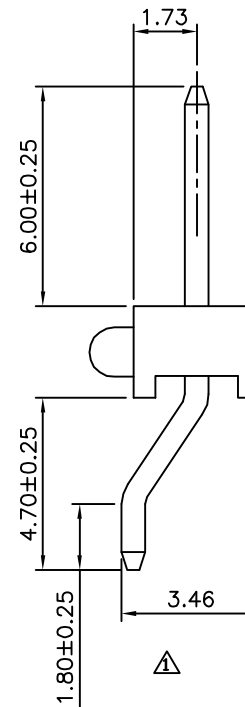
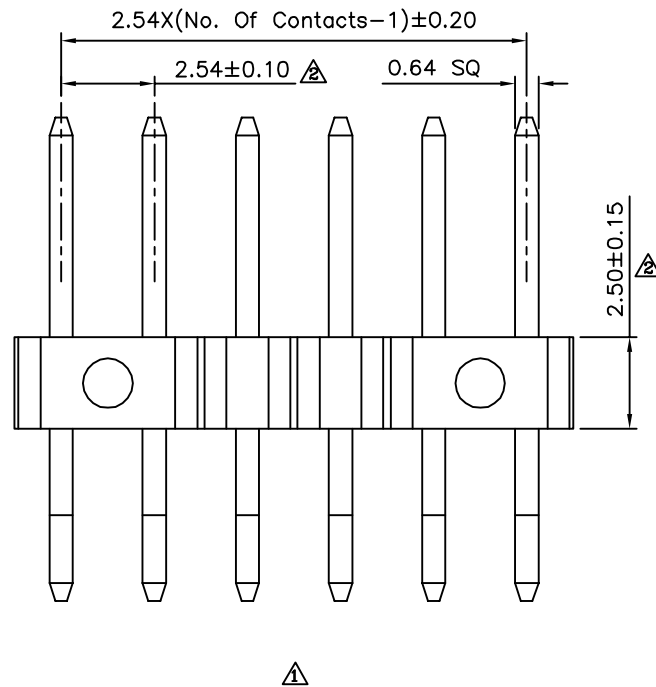
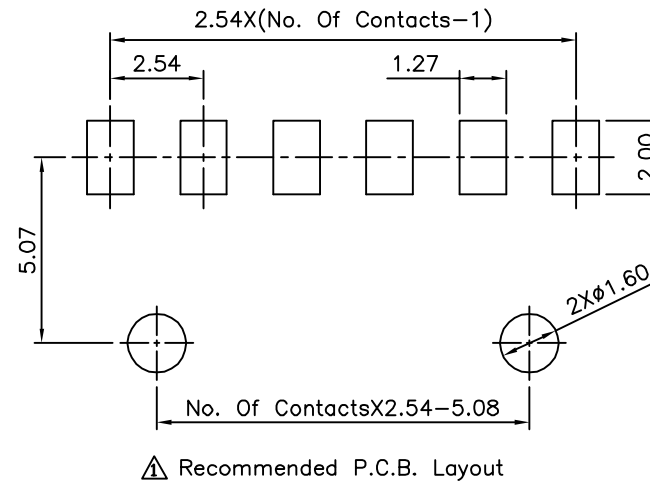


△ SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 △ Contact:Copper Alloy,Gold Flash Over Nickel
 No. Of Contacts:03~40 Contacts
 RoHS Compliant

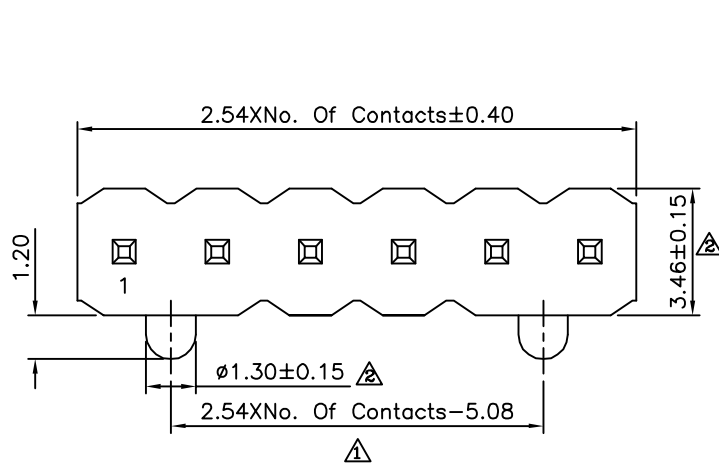

DRAWING No. 11054		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°							
		EMILY									
		CHECKED BY									
		HZF									
DRAWING BY		SONG				△ A2	Modify Data		HZF	11/22/2012	
						△ A1	Modify Data		HZF	12/13/2010	
						△ A0	NEW RELEASE		HZF	09/27/2006	
SCALE	NONE	REV.	A2	UNIT		NO. REV.	REVISIONS		CHK	DATE	
	5		6	mm	7		8	9		0	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.