
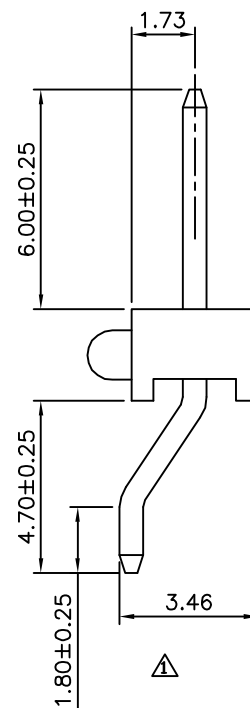
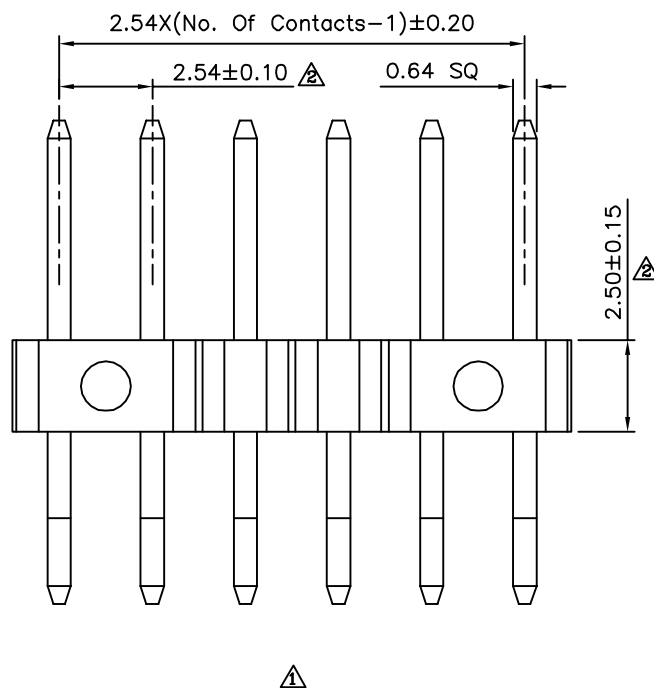
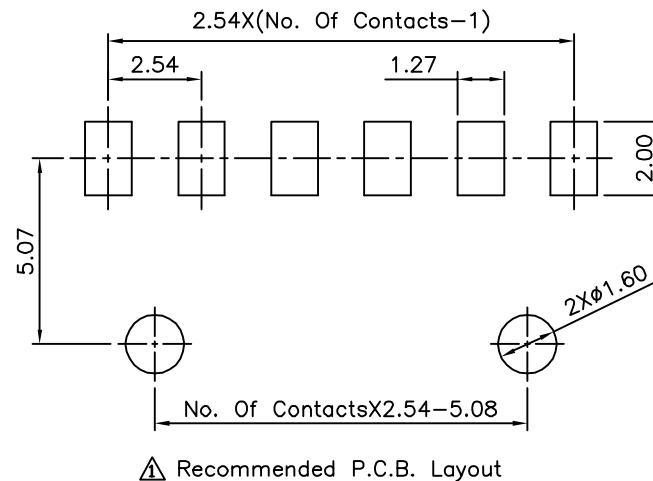


△ SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
△ Contact:Copper Alloy,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

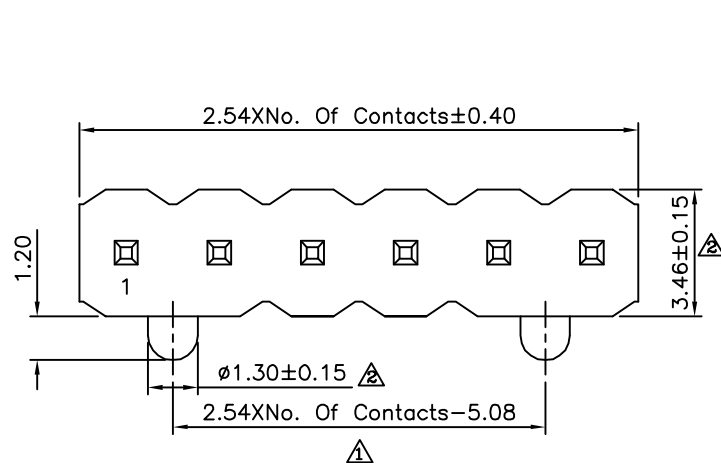

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
11056		EMILY		.X ±0.38		A2		Modify Data	
		HZF		.XX ±0.25		A1		Modify Data	
		SONG		ANG. ±5°		A0		NEW RELEASE	
SCALE	NONE	REV.	A2	UNIT	mm	NO.	REV.	REVISIONS	CHK
									DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.