
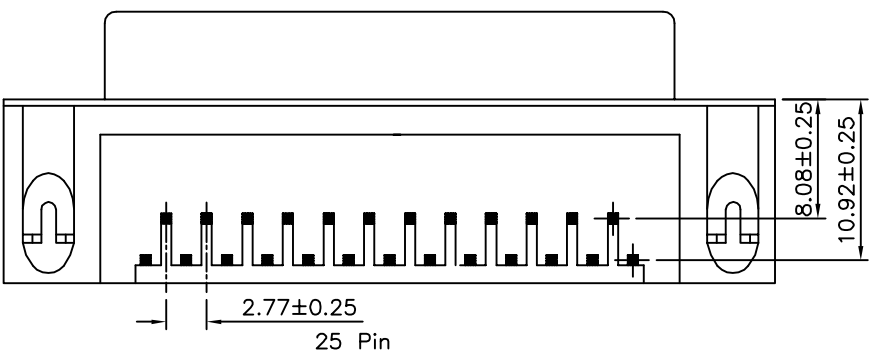
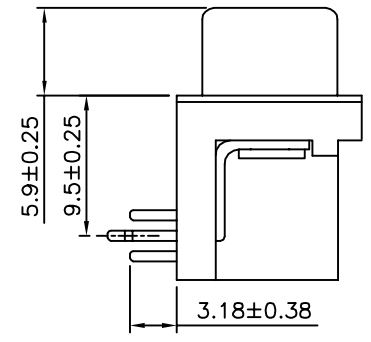


SPECIFICATION
 Voltage Rating:250V
 Current Rating:5 Amp
 Contact Resistance:30 Milliohms Max
 Insulation Resistance:1000 Megaohms Min
 Dielectric Voltage:500V AC R.M.S For 1 Minute
 Temperature Range:-55°C~+105°C
 Housing:PBT+30%G.F(UL94V-0),Black
 Contact:Brass,Gold Plated On Contact Area,Tin Plated On Solder Tails,Over Nickel
 Shell:SPCC,Nickel Plated
 Boardlock:SPCC,Tin Plated
 Rivet:Brass,Nickel Plated
 RoHS Compliant

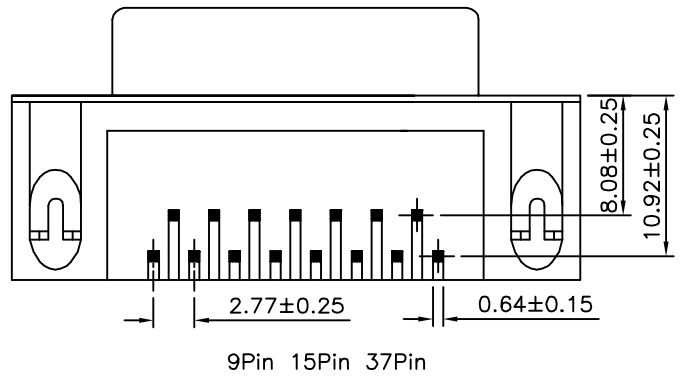

Pin	A	B	C
9	30.81	24.99	16.33
15	39.14	33.32	24.66
25	53.04	47.04	38.38
37	69.32	63.50	54.84

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 11080

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X ±0.50
 XX ±0.30
 XXX ±0.25
 .XXX ±0.10
 ANG. ±2°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/25/2015

SCALE NONE REV. A0