
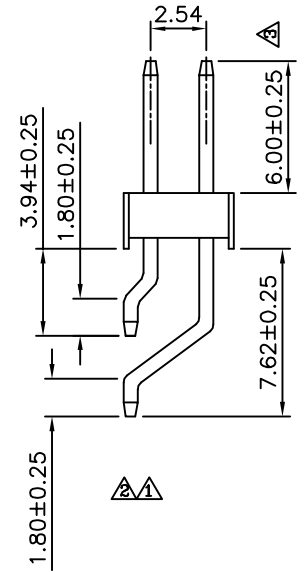
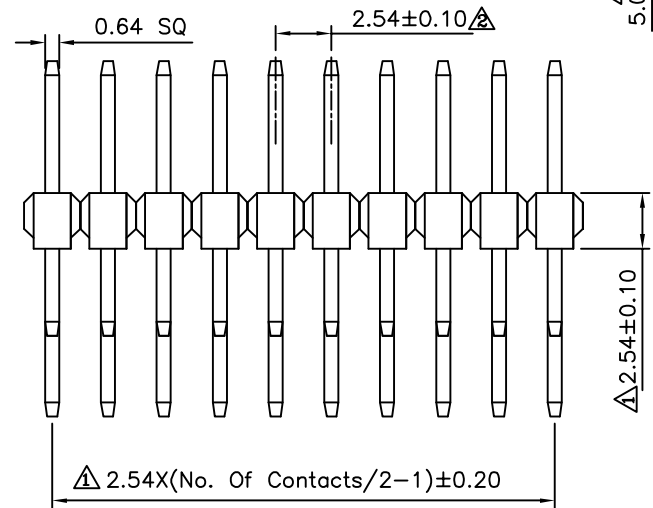


△ Recommended P.C.B Layout

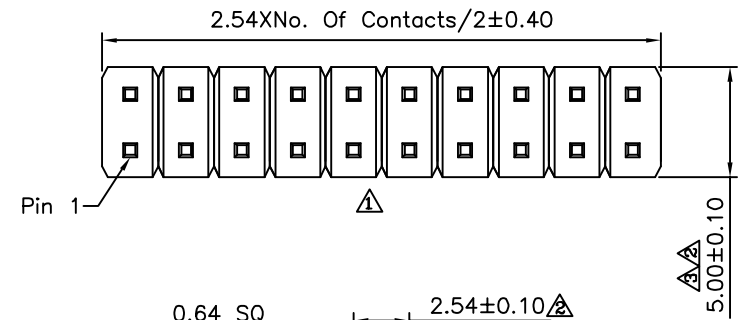

△△ SPECIFICATION

- Current:3A
- Insulation Resistance:1000 Megaohms Min.
- Withstanding Voltage:1000V AC RMS
- Contact Resistance:20 Milliohms Max.
- Operation Temperature:-55°C~+105°C
- Housing:PA6T(UL94V-0),Black
- △ Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:04~80 Contacts
- RoHS Compliant

**4UCON**

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
11172		EMILY		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		YBL		
REV.	A3	NO. REV.		REVISIONS

△ A3	Modify Data	HZF	12/13/2013
△ A2	Modify Data	HZF	04/02/2012
△ A1	Modify Data	HZF	01/26/2011
△ A0	NEW RELEASE	HZF	01/18/2007
NO. REV.	REVISIONS	CHK	DATE