

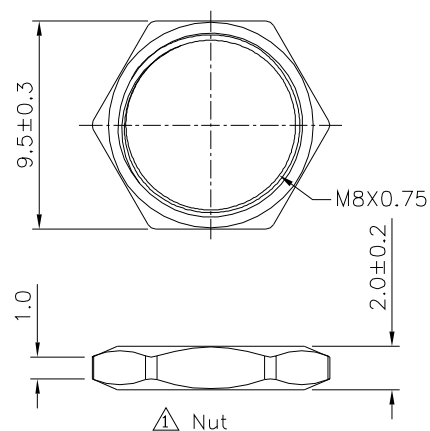


# SPECIFICATION

Rating:DC 30V 1.0A  
Withstanding Voltage:500V AC  
Contact Resistance:30 Milliohms Max.  
Insulation Resistance:100 Megaohms Min.(DC 250V)  
Insertion And Extraction Force:3-20N  
Life Test:5000 Cycles  
RoHS Compliant

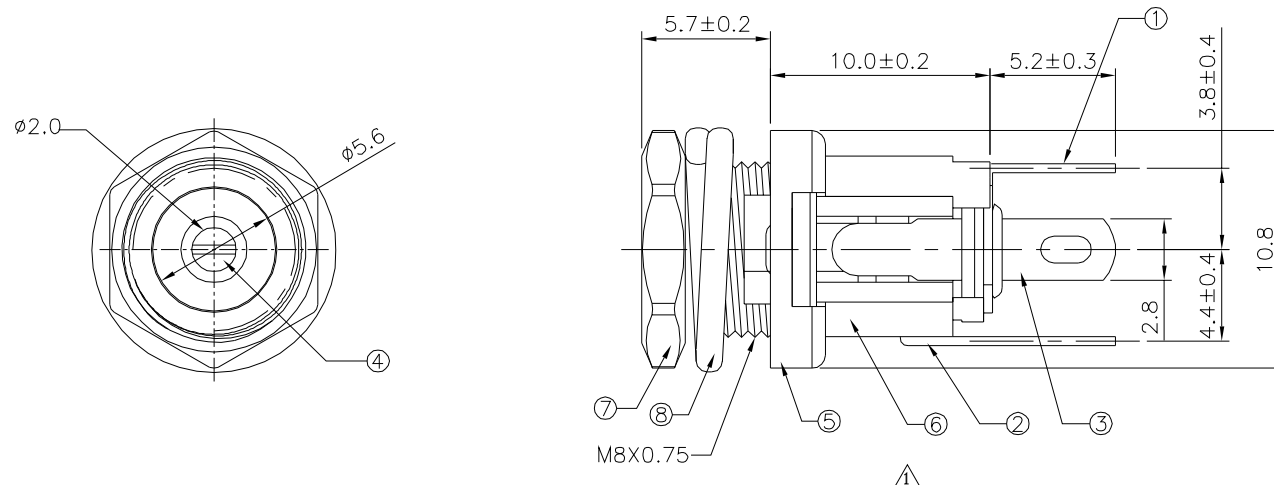

| No. | Description    | Q'ty | Material | Remark        |
|-----|----------------|------|----------|---------------|
| ①   | 1# Curve Piece | 1    | Brass    | Tin Plated    |
| ②   | 2# Curve Piece | 1    | Brass    | Tin Plated    |
| ③   | Spring         | 1    | Bronze   | Tin Plated    |
| ④   | Pin            | 1    | Brass    | Nickel Plated |
| ⑤   | Axis Support   | 1    | Brass    | Nickel Plated |
| ⑥   | Housing        | 1    | PBT      |               |
| ⑦   | Nut            | 1    | Brass    | Nickel Plated |
| ⑧   | Split Washer   | 1    | Steel    | Nickel Plated |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 11293

11293

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY HAO


REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.15

ANG. ±1.5°

UNIT mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| ②   | A2   | Modify Data | HZF | 07/23/2015 |
| ①   | A1   | Modify Data | HZF | 07/18/2015 |
| ①   | A0   | NEW RELEASE | HZF | 12/29/2014 |