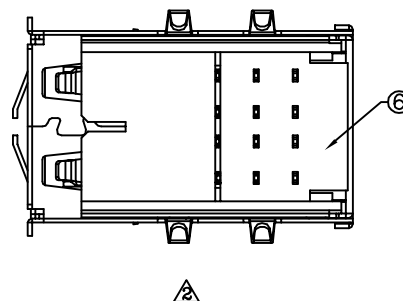
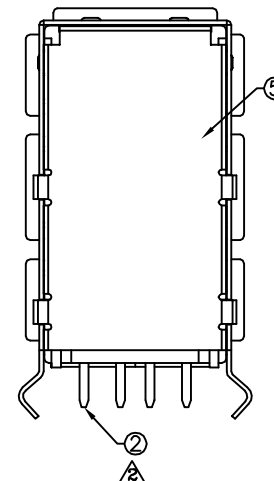
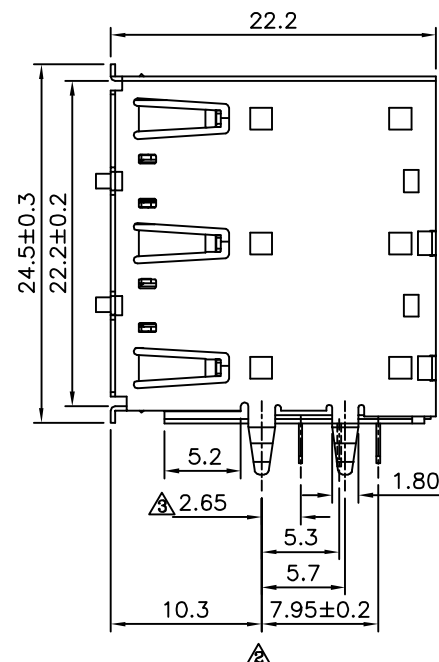
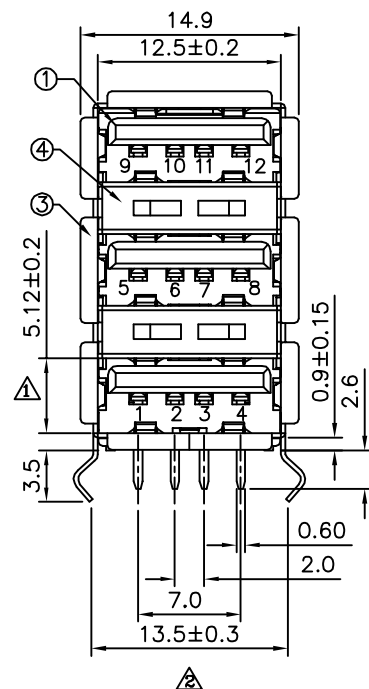


**SPECIFICATION**

Rated Voltage And Current:1.5A At 250V AC Min.

Withstanding Voltage:750V AC RMS For 1 Minute(Rev. 1.1)

Contact Resistance:30 Milliohms Max.


Insulation Resistance:1000 Megaohms Min. At 500V DC

Insertion Force:35N Max.

Extraction Force:10N Min.

Durability(Life Test):1500 Cycles

RoHS Compliant

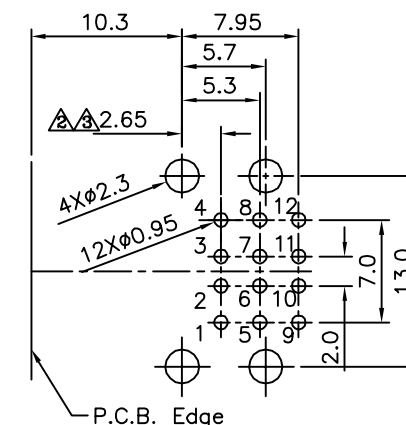Recommended P.C.B. Layout
(Bottom View)

No.	Description	Q'ty	Material	Remark
①	Housing	1	PBT+G.F.	Black
②	Pin Terminal	12	Phosphor Bronze	Gold Plated On Contact Area,Tin Plated On Solder Tails,Over Nickel
③	Shell	1	Brass	Tin Plated
④	Spring Clip	1	Brass	Tin Plated
⑤	Rear Shell	1	SPCC	Nickel Plated
⑥	Bottom Cover	1	PBT+G.F.	Black

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11294

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

SCALE

NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES AREX. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05UNIT
mm

A3

Modify Data

HZF

06/18/2015

A2

Modify Data

HZF

08/27/2010

A1

Modify Data

HZF

08/13/2009

A0

NEW RELEASE

NO.REV.

REVISIONS

CHK

DATE