

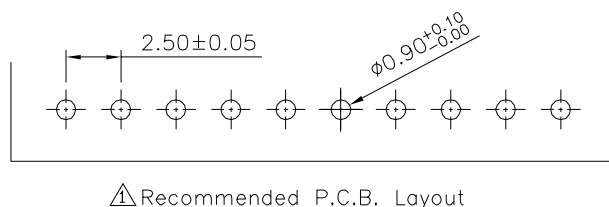


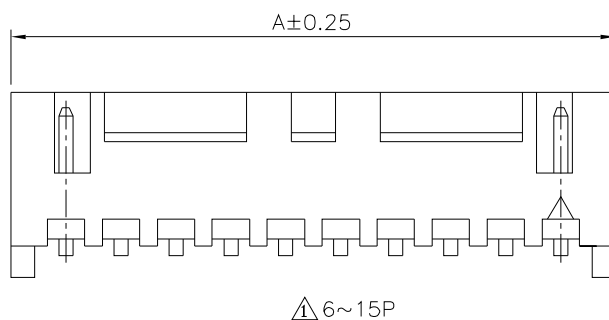



# △△ SPECIFICATION

Current Rating:3A(22 AWG)  
Voltage Rating:250V AC(RMS)/DC  
Withstand Voltage:1000V AC For 1 Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Ambient Temperature Range:-25°C~+85°C  
Insulator:PA66(UL94V-0),White  
Contact:Brass,Tin Plated  
RoHS Compliant

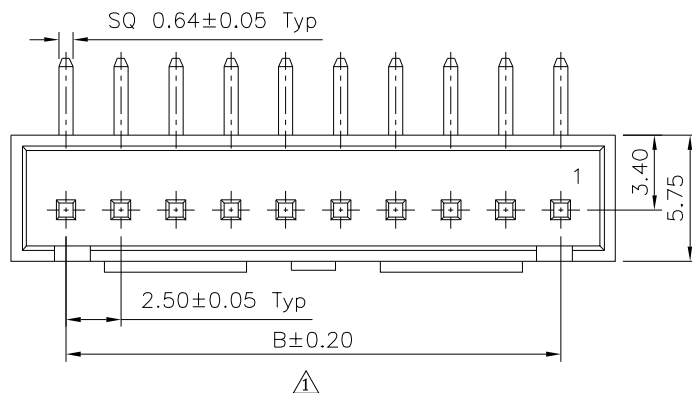

| △△ | Pin   | A     | B |
|----|-------|-------|---|
| 2  | 7.48  | --    |   |
| 3  | 9.98  | 5.00  |   |
| 4  | 12.48 | 7.50  |   |
| 5  | 14.98 | 10.00 |   |
| 6  | 17.48 | 12.50 |   |
| 7  | 19.98 | 15.00 |   |
| 8  | 22.48 | 17.50 |   |
| 9  | 24.98 | 20.00 |   |
| 10 | 27.48 | 22.50 |   |
| 11 | 29.98 | 25.00 |   |
| 12 | 32.48 | 27.50 |   |
| 13 | 34.98 | 30.00 |   |
| 14 | 37.48 | 32.50 |   |
| 15 | 39.98 | 35.00 |   |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. △

11314

APPROVED BY MEI

CHECKED BY HZF


DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
△ .X ±0.25  
.XX ±0.15  
.XXX ±0.08

SCALE NONE

REV. A2

UNIT mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | A2   | Modify Data | HZF | 04/22/2019 |
| △   | A1   | Modify Data | HZF | 05/08/2010 |
| △   | A0   | NEW RELEASE |     |            |