
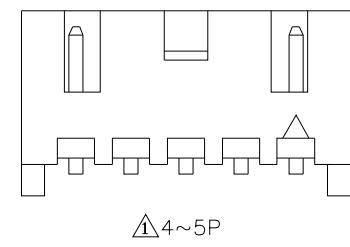
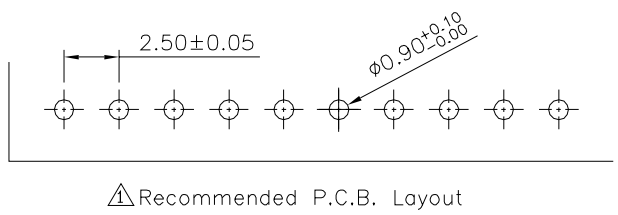


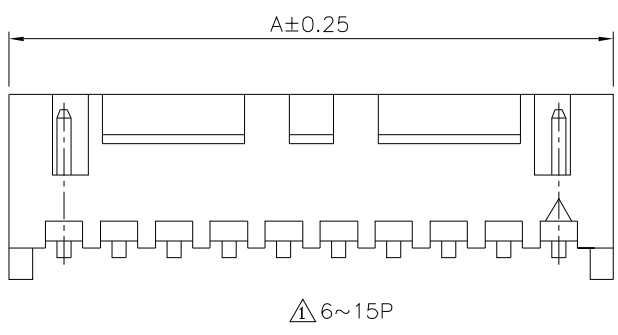



△△ SPECIFICATION

Current Rating:3A(22 AWG)
 Voltage Rating:250V AC(RMS)/DC
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Ambient Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-0),White
 Contact:Brass,Tin Plated
 RoHS Compliant

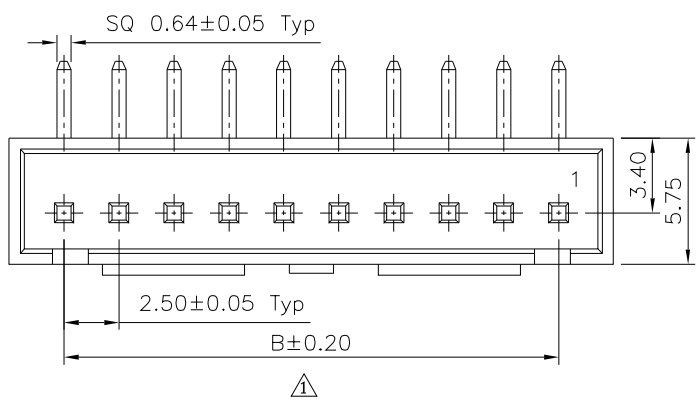

| △ | Pin | A | B |
|---|-----|-------|-------|
| △ | 2 | 7.48 | -- |
| △ | 3 | 9.98 | 5.00 |
| △ | 4 | 12.48 | 7.50 |
| △ | 5 | 14.98 | 10.00 |
| △ | 6 | 17.48 | 12.50 |
| △ | 7 | 19.98 | 15.00 |
| △ | 8 | 22.48 | 17.50 |
| △ | 9 | 24.98 | 20.00 |
| △ | 10 | 27.48 | 22.50 |
| △ | 11 | 29.98 | 25.00 |
| △ | 12 | 32.48 | 27.50 |
| △ | 13 | 34.98 | 30.00 |
| △ | 14 | 37.48 | 32.50 |
| △ | 15 | 39.98 | 35.00 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|---------------|----|----------------|--|--|
| DRAWING No. △ | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.15 .XXX ±0.08 |
| 11315 | | MEI | | |
| | | CHECKED BY HZF | | |
| SCALE NONE | | DRAWING BY CYP | | UNIT mm |
| REV. | A2 | NO. REV. | | REVISIONS |

| | | | |
|------|-------------|-----|------------|
| △ A2 | Modify Data | HZF | 04/22/2019 |
| △ A1 | Modify Data | HZF | 05/08/2010 |
| △ A0 | NEW RELEASE | | |
| CHK | DATE | | |