
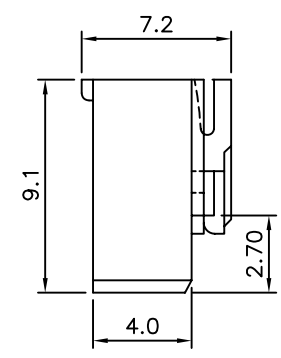
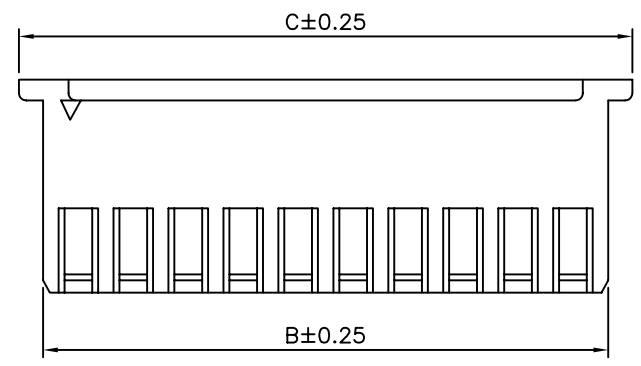


SPECIFICATIONS
 Material: Nylon 66, UL 94V-0
 2P~3P No Side Poles

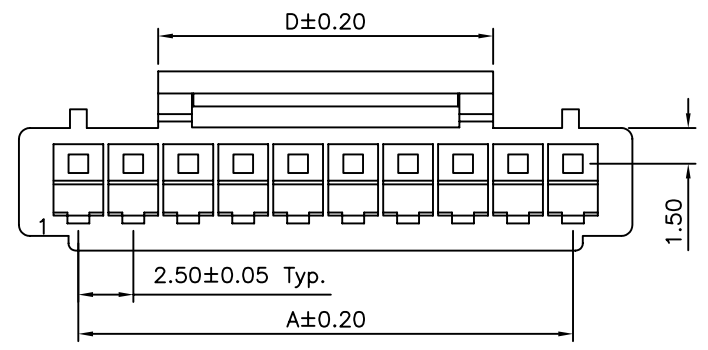

Circuits	A	B	C	D	Q'ty/Bag
02	2.50	5.7	7.2	3.0	1000
03	5.00	8.2	9.7	3.0	1000
04	7.50	10.7	12.2	5.3	1000
05	10.00	13.2	14.7	6.5	1000
06	12.50	15.7	17.2	6.5	1000
07	15.00	18.2	19.7	10.3	500
08	17.50	20.7	22.2	10.3	500
09	20.00	23.2	24.7	10.3	500
10	22.50	25.7	27.2	15.3	500
11	25.00	28.2	29.7	15.3	500
12	27.50	30.7	32.2	15.3	500
13	30.00	33.2	34.7	15.3	500
14	32.50	35.7	37.2	15.3	500
15	35.00	38.2	39.7	15.3	500

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.08
11330		MEI		
		CHECKED BY		
		BECKY		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	BO	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	BO	NEW RELEASE	BECKY	11/28/2005