



**△△ SPECIFICATION**


Current Rating:5A AC/DC  
 Voltage Raing:300V AC/DC  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+90°C  
 Material:PA66(UL94V-2)  
 RoHS Compliant

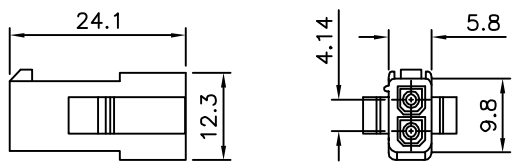


△ 1X02 Pin

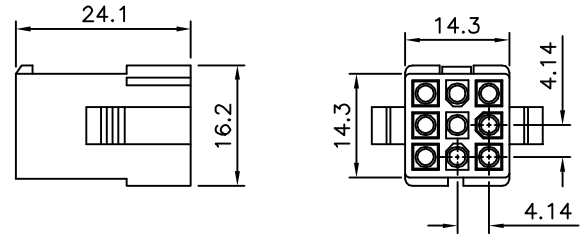


△ 3X03 Pin

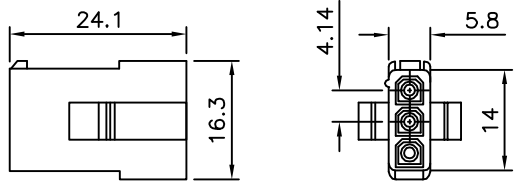


△ 1X03 Pin

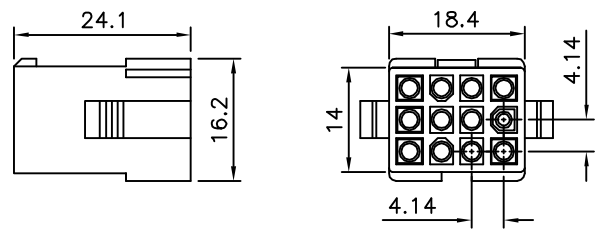


△△ 3X04 Pin

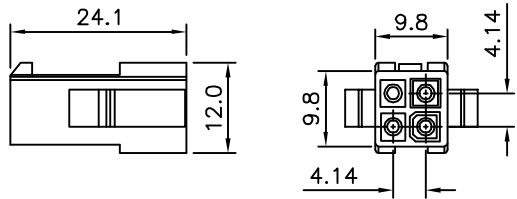

△ 2X02 Pin

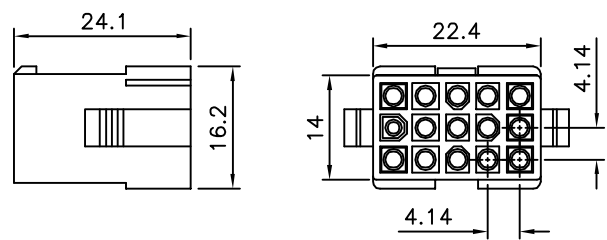

△△ 3X05 Pin

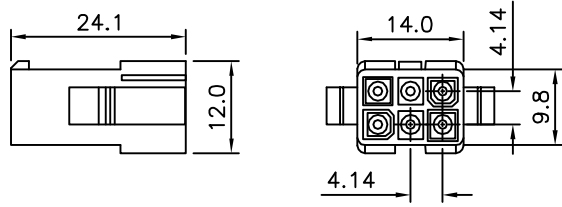

△ 2X03 Pin

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.3 △ .X ±0.3 △ .XX ±0.3
11345		EMILY		
		CHECKED BY HZF		
DRAWING BY		SONG		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	09/18/2012
△ A1		Modify Data	HZF	11/10/2011
△ A0		NEW RELEASE		