


**△ SPECIFICATION**  
 Current Rating: 2 Amp/Way Max.  
 Voltage Rating: 150V AC  
 Withstanding Voltage: 2000V AC (1 Minute)  
 Test Time = 60s/PCS  
 Contact Resistance: 20 Milliohms Max.  
 Wire Range: 20~26 AWG  
 Operation Temperature: -40°C ~ +105°C  
 Test Temperature: 250°C 5 Seconds Max.  
 Wire Guard: Stainless Steel  
 Surface Of Solder Tails: Copper Alloy, Tin Plated  
**△ Insulator Body (Housing):** Polyamide+G.F. (UL94V-0), Green  
 RoHS Compliant  
 \* 02~20P Available

(No. Of Contacts-1)X2.54

(No. Of Contacts+1)X2.54

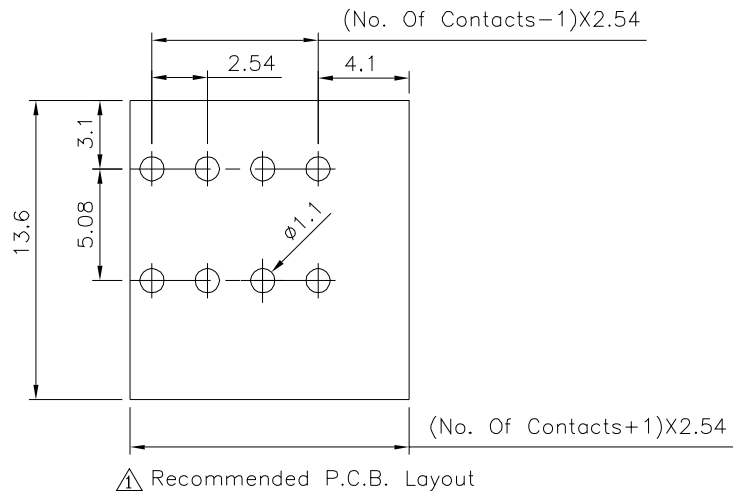

△ Recommended P.C.B. Layout

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
11368		EMILY		
		CHECKED BY		
		HZF		
DRAWING BY		HAO		UNIT
SCALE	NONE	REV.	A2	mm

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	08/18/2020
△	A1	Modify Data	HZF	05/12/2015
△	A0	NEW RELEASE	HZF	05/23/2009