
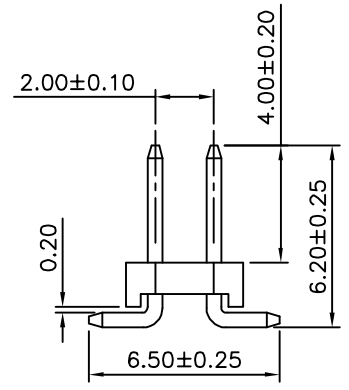
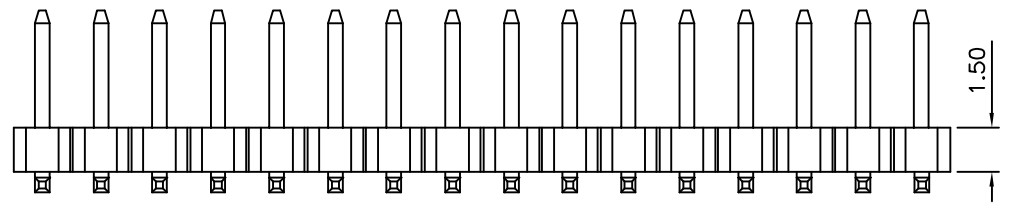


Recommended P.C.B. Layout

**SPECIFICATION**  
 Current Rating:1.5 Amp/Contact Max.  
 Withstand Voltage:450V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

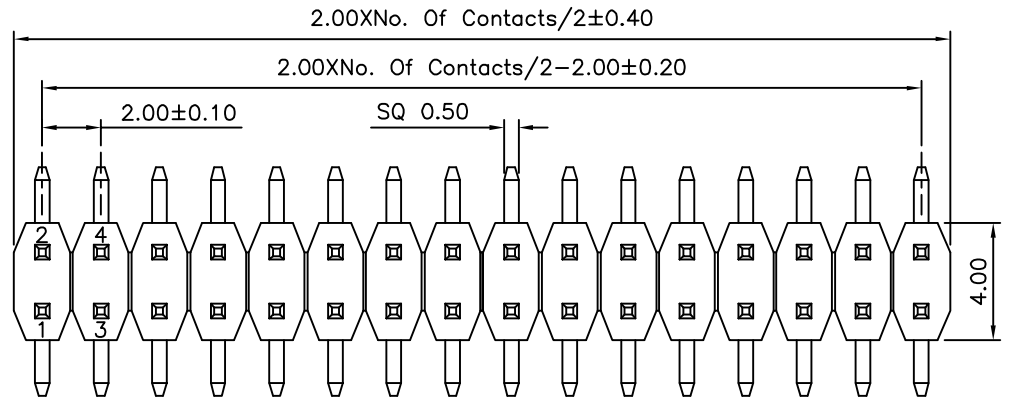

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
11501		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A0	NO. REV.

△ A0	NEW RELEASE	HZF	05/03/2012
	REVISIONS	CHK	DATE