File No. 182PD02237 SHEET 1/1

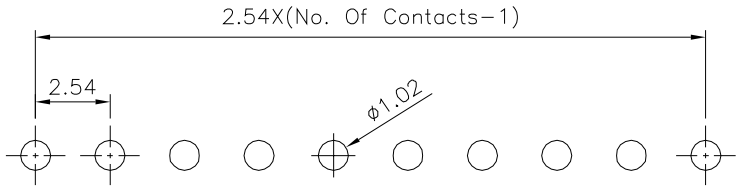

Recommended P.C.B. Layout

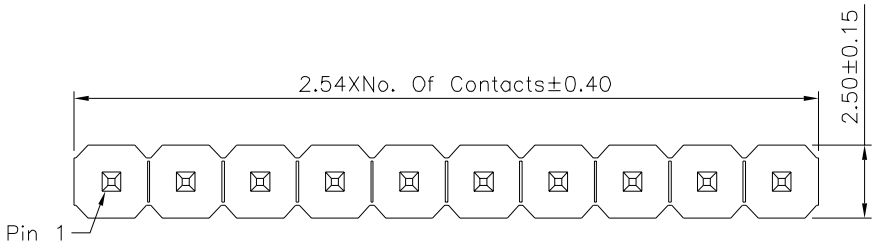

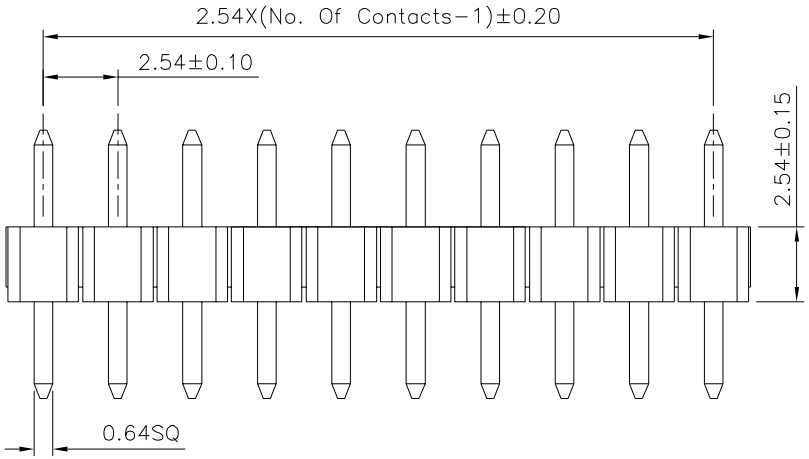

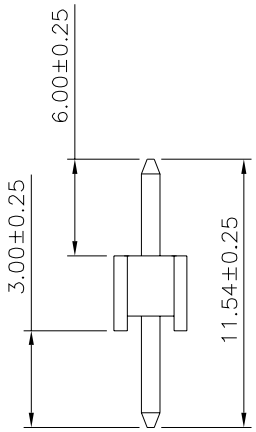

SPECIFICATION

Current:3A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1000V AC/Mimute
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:02~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	11716	APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
		CHECKED BY	HZF		.X ±0.38
		DRAWING BY	CYP		.XX ±0.25
SCALE	NONE	REV.	B0	UNIT mm	XXX ±0.05

NO.	REV.	REVISIONS	CHK	DATE
△0	B0	NEW RELEASE	HZF	03/16/2025