

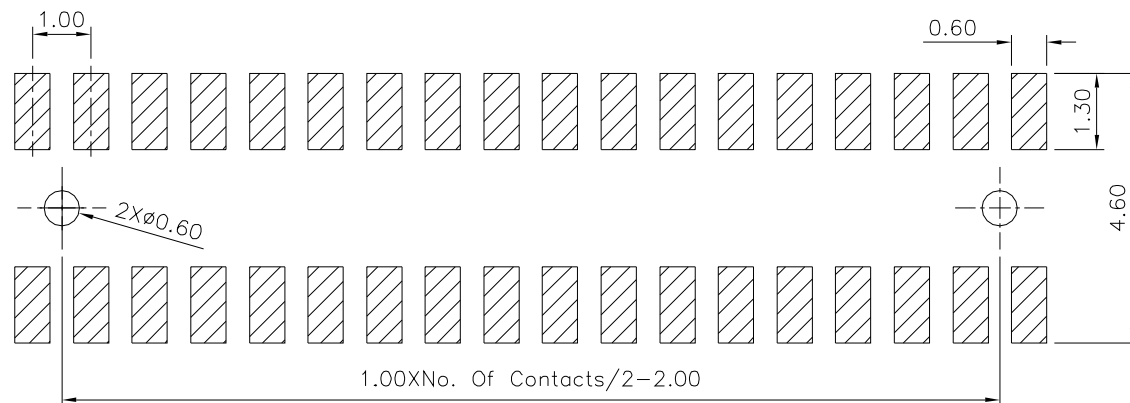



SPECIFICATION

Current Rating:1.0A
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 ⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
 RoHS Compliant

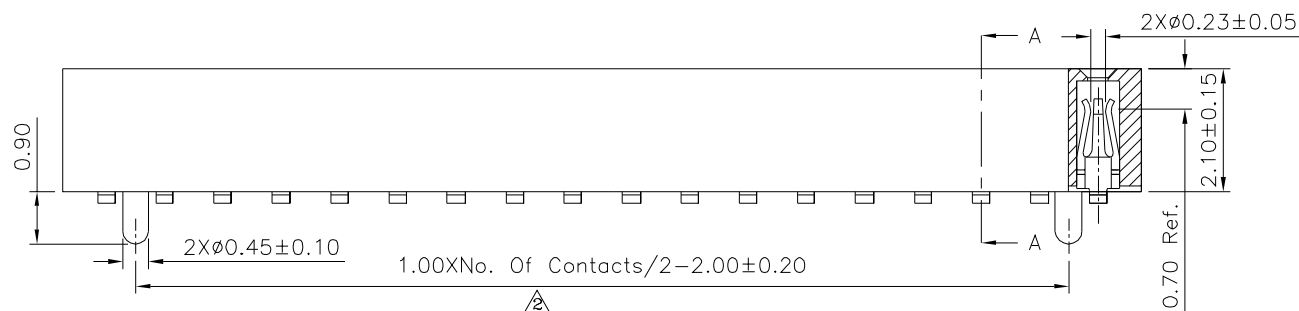

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05)

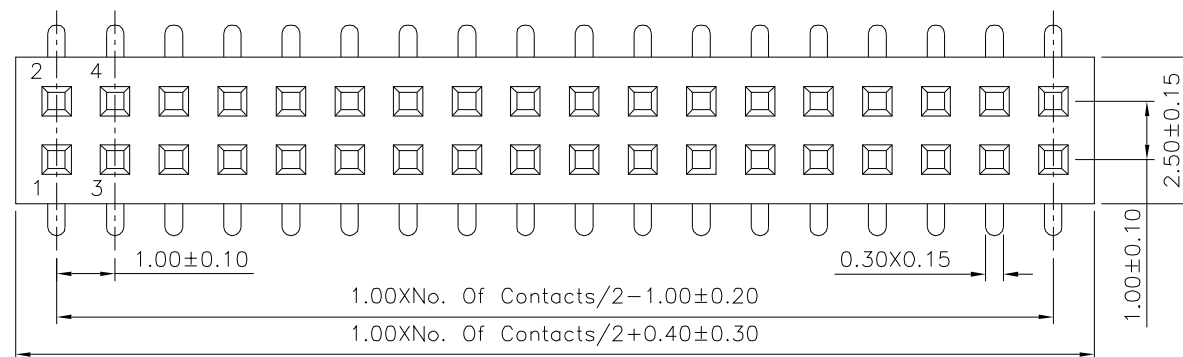

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠

11825

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE


NONE

REV.

B2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ B2	Modify Data	HZF	09/11/2024	
⚠ B1	Modify Data	HZF	11/22/2012	
⚠ B0	NEW RELEASE	HZF	09/26/2012	