
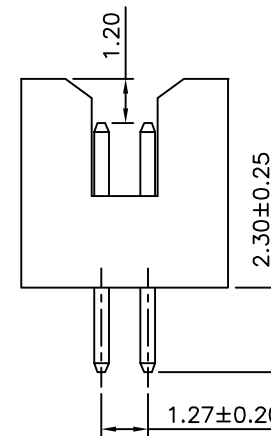
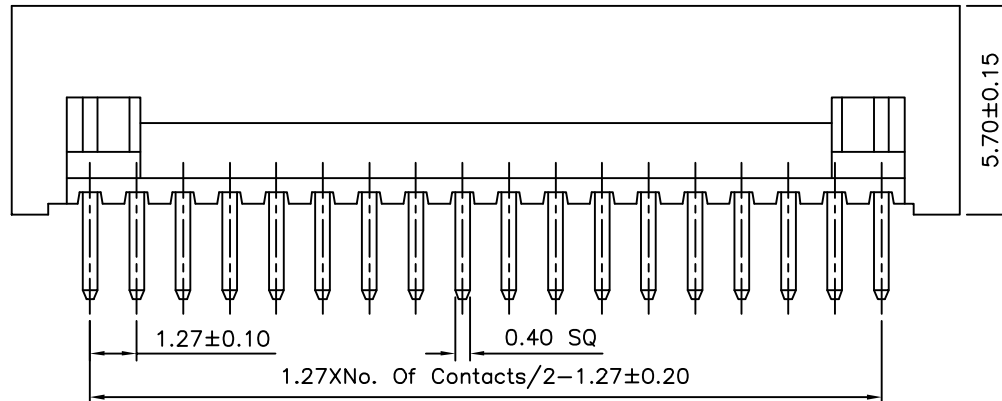


SPECIFICATION
 Current Rating:1 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

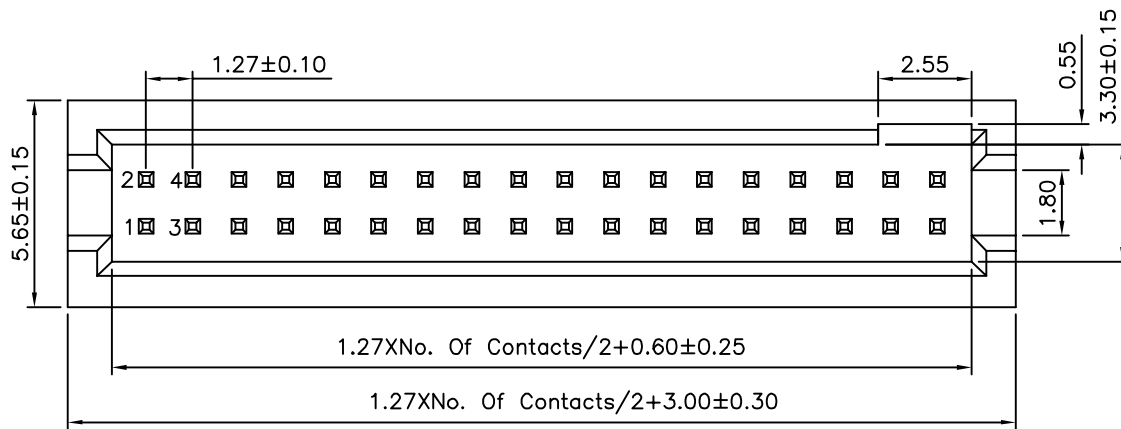

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12220

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.40

.XX ±0.25

.XXX ±0.15

ANG. ±3°


SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

05/01/2011

CHK

DATE