
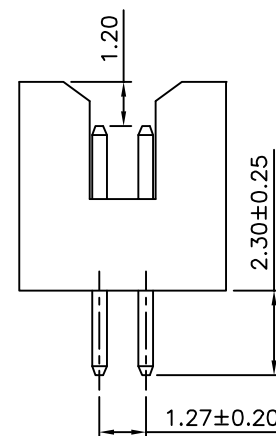
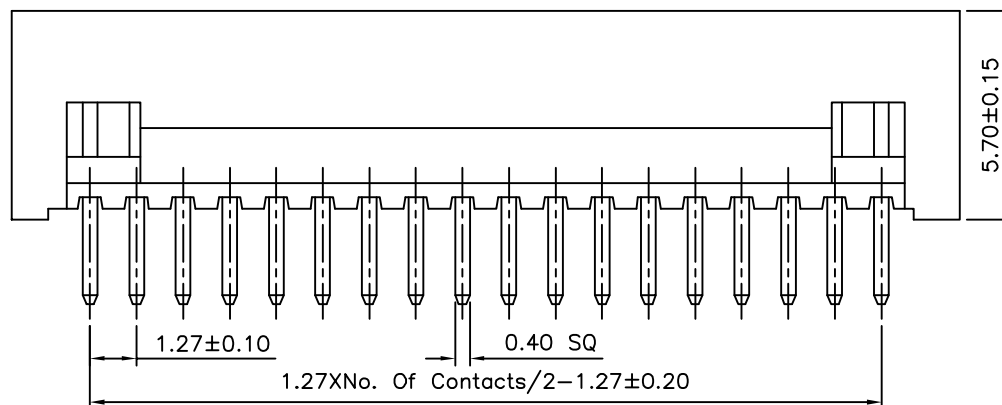


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

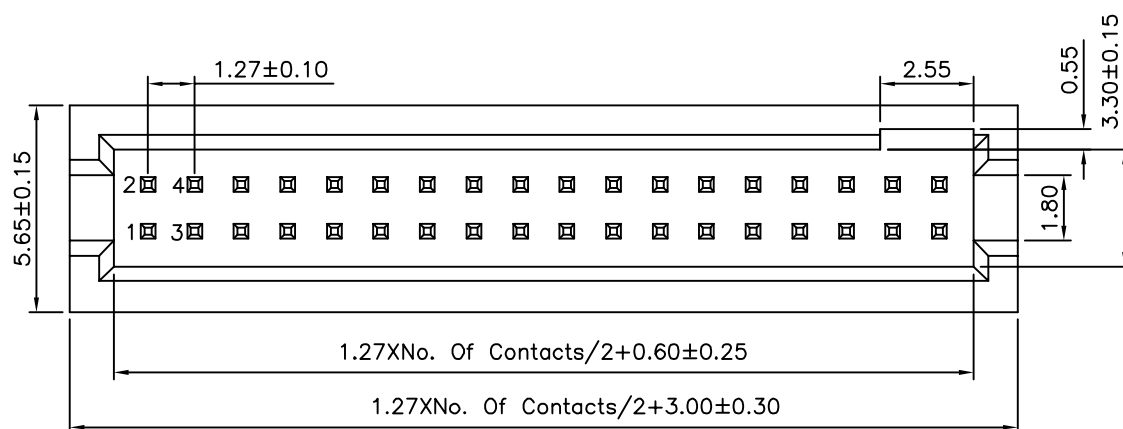

SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12238

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE