
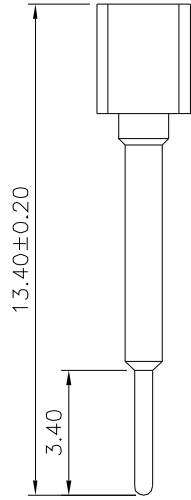
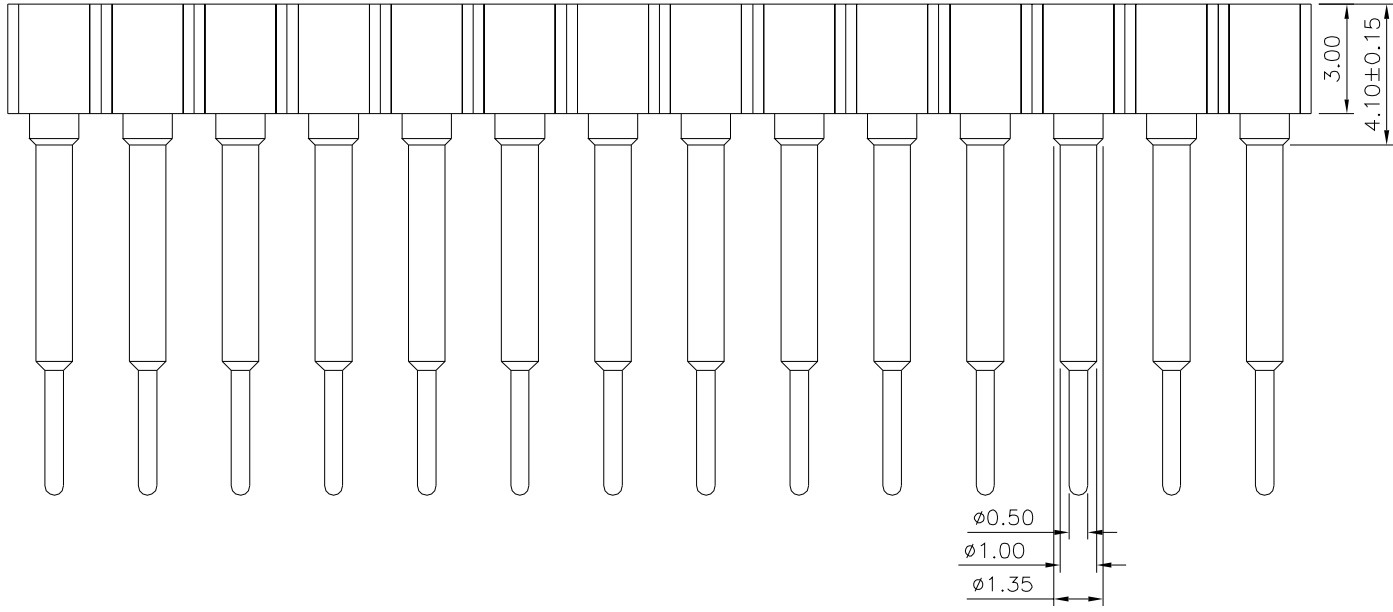


Recommended P.C.B. Layout

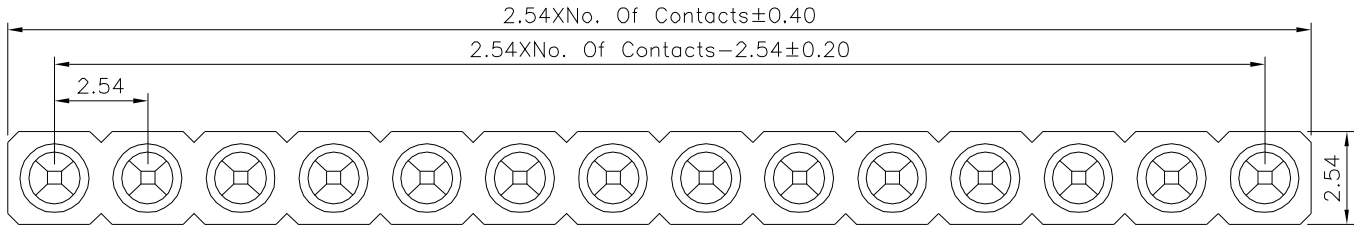

△ SPECIFICATION

Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms/Contact Max.
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operation Voltage: 60V AC/DC
 Average Insertion Force With Steel Pin Of
 ø0.43mm: < 250g
 Average Withdrawal Force With Steel Pin Of
 ø0.43mm: > 90g Min.
 Operation Temperature: Gold Plated: -55°C ~ +105°C
 Tin Plated: -40°C ~ +105°C
 Pin (Outer Sleeve): Brass, Tin Plated Over Nickel
 Clip (Contact 4 Finger): Beryllium Copper,
 Gold Plated Over Nickel
 Insulator (Housing): PPS (UL94V-0), Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 12294

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 XX ±0.30
 XXX ±0.20
 .XXX ±0.10
 ANG. ±5°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Spec.	HZF	11/21/2019
△ A0		NEW RELEASE	HZF	10/22/2010