

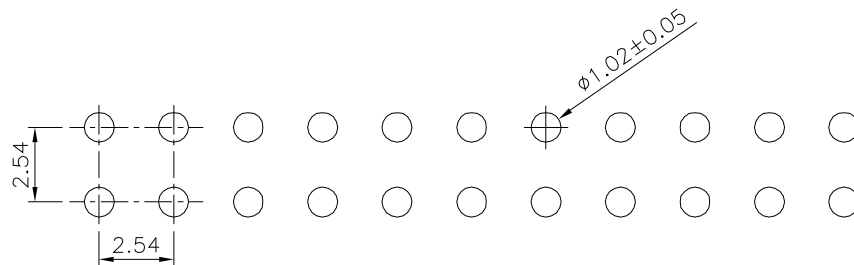



△ SPECIFICATION
 Current Rating: 1 Amp
 Insulation Resistance: 3000 Megaohms Min.
 Contact Resistance: 30 Milliohms Max.
 Dielectric Withstanding Voltage: 500V AC For 1 Minute
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT+G.F. (UL94V-0), Black
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 RoHS Compliant

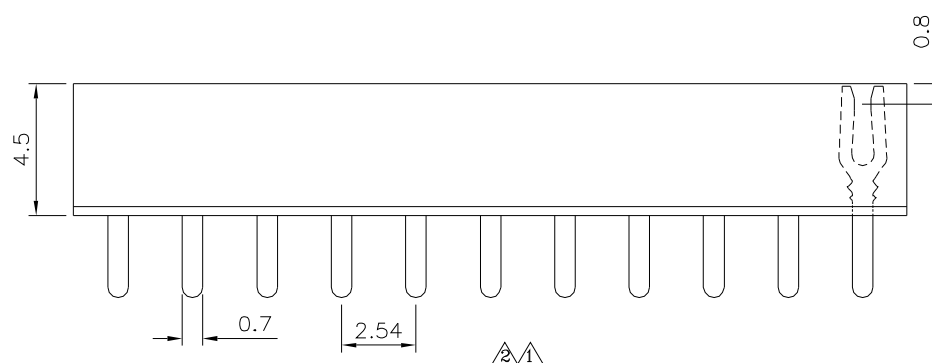

Recommended P.C.B. Layout

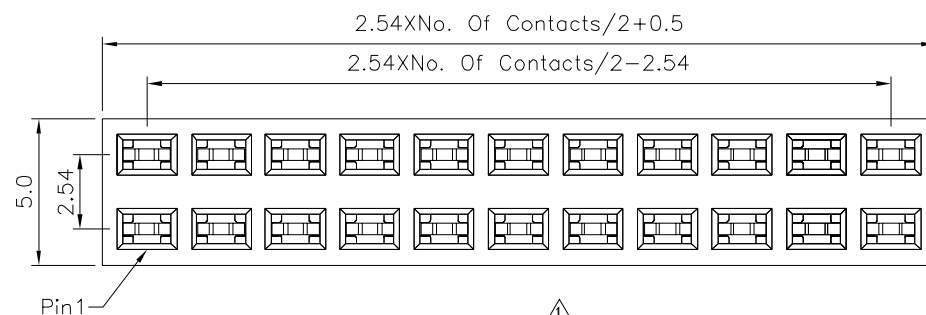

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12512

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE


△ .X ±0.38

.XX ±0.25

ANG.

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	08/09/2017
△1	A1	Modify Data	HZF	04/21/2012
△0	A0	NEW RELEASE		