

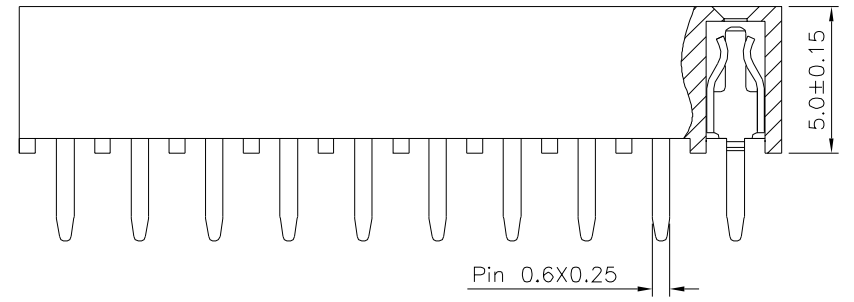


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

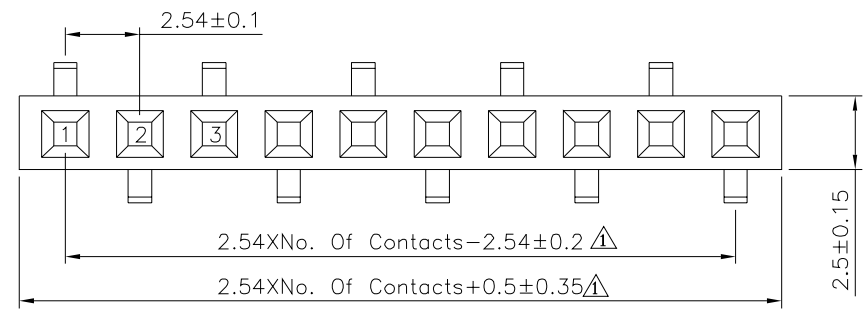

SPECIFICATION

Current Rating: 3A
 △ Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Operation Temperature: -40°C ~ +105°C
 Housing: PA6T(UL94V-0), Black
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5* UNIT mm
12534		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		△ A1 Modify Data HZF 07/26/2021 △ A0 NEW RELEASE HZF 11/19/2013 NO. REV. REVISIONS CHK DATE
SCALE	NONE	REV.	A1	

