

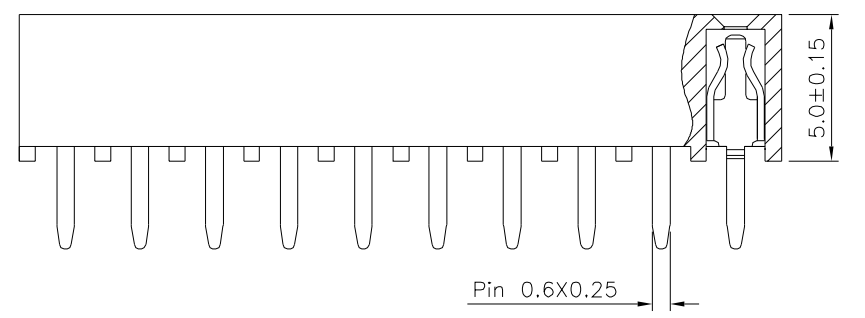


Recommended P.C.B. Layout (Top View)  
(PCB Board Tolerance  $\pm 0.05$ )

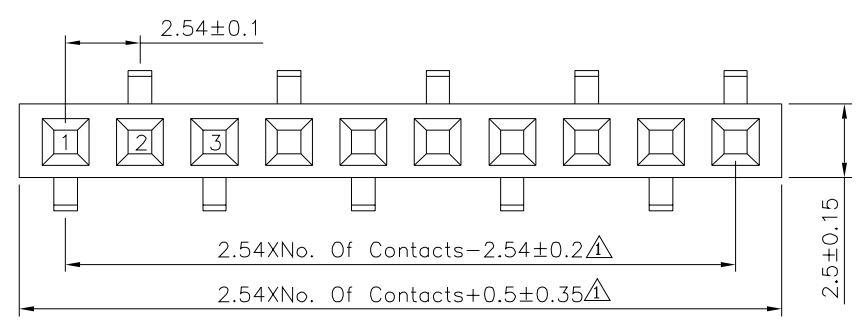

**SPECIFICATION**  
 Current Rating: 3A  
 $\Delta$  Withstand Voltage: 1000V AC Min./Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Housing: PA6T(UL94V-0), Black  
 Contact: Phosphor Bronze, Gold Flash Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.25$ X.* $\pm 2^{\circ}$ .X $\pm 0.20$ .X* $\pm 1.5^{\circ}$ .XX $\pm 0.15$ .XX* $\pm 1^{\circ}$ .XXX $\pm 0.10$ .XXX* $\pm 0.5^{\circ}$
12576		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SAN		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
$\Delta$ A1		Modify Data	HZF	07/26/2021
$\Delta$ A0		NEW RELEASE	HZF	11/19/2013