
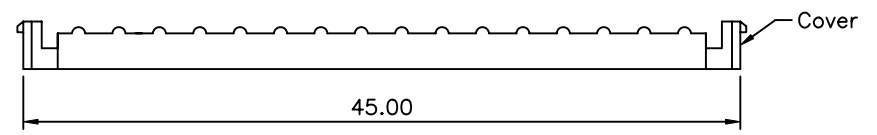
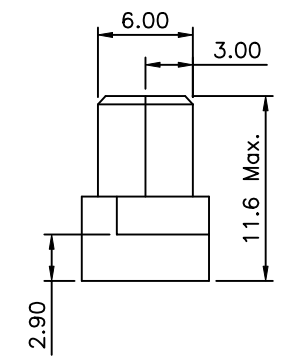
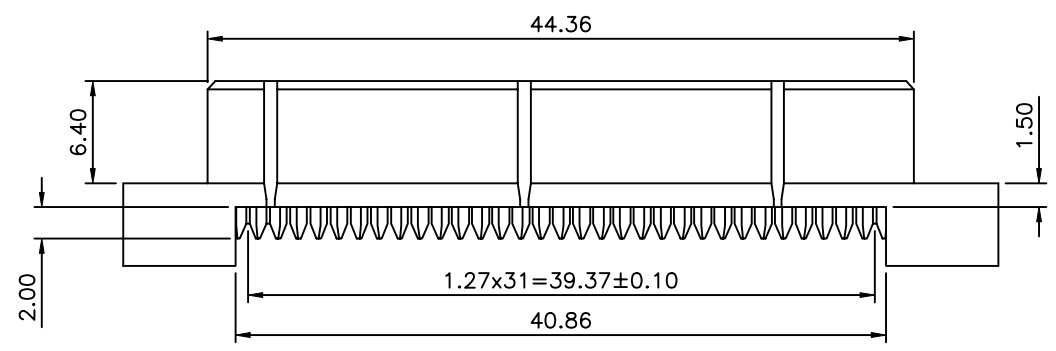


SPECIFICATION

Current Rating:2Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Insulation Resistance:1000 Megohms Min. At DC 500V
 Operation Temperature:-55°C~+105°C
 Housing:PBT+30% Glass Filled(UL94V-0)
 Contact:Phosphor Bronze,Gold Plated
 RoHS Compliant

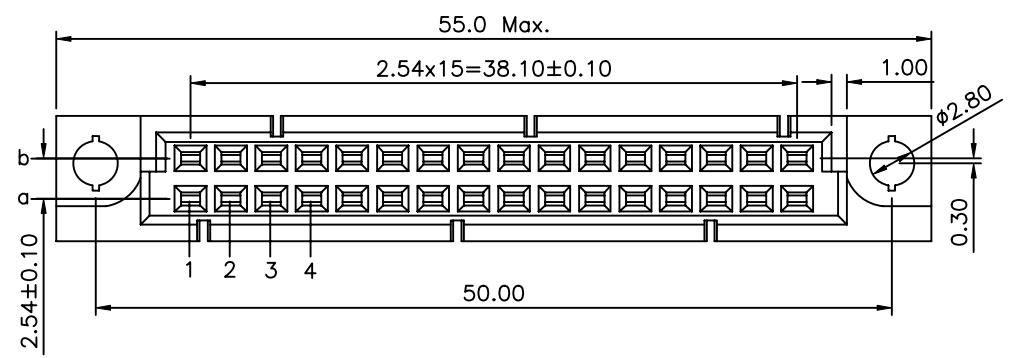

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.15
12750		MEI		
		HZZ		
		DRAWING BY		
		HYY		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZZ	04/21/2009