
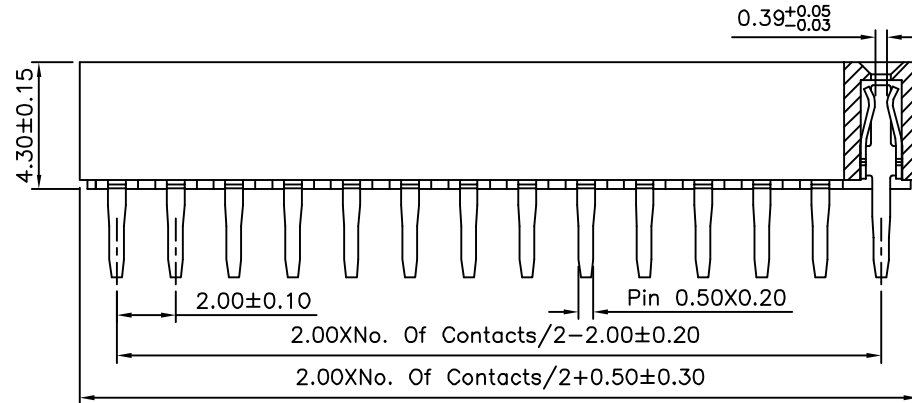



Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

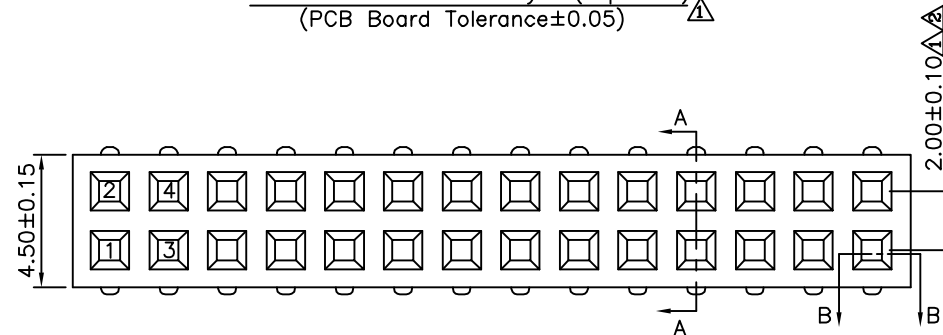

Section B-B



Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12826

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Dim.	HZF	09/24/2015
3	A3	Modify Data	HZF	11/27/2014
2	A2	Modify Data	HZF	10/11/2012
1	A1	Modify Data	HZF	08/18/2011
0	A0	NEW RELEASE	BECKY	11/04/2005