
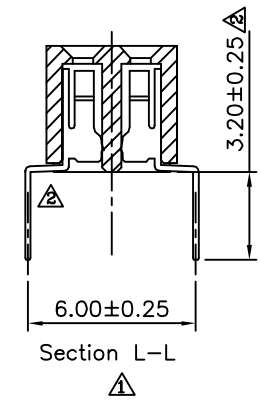
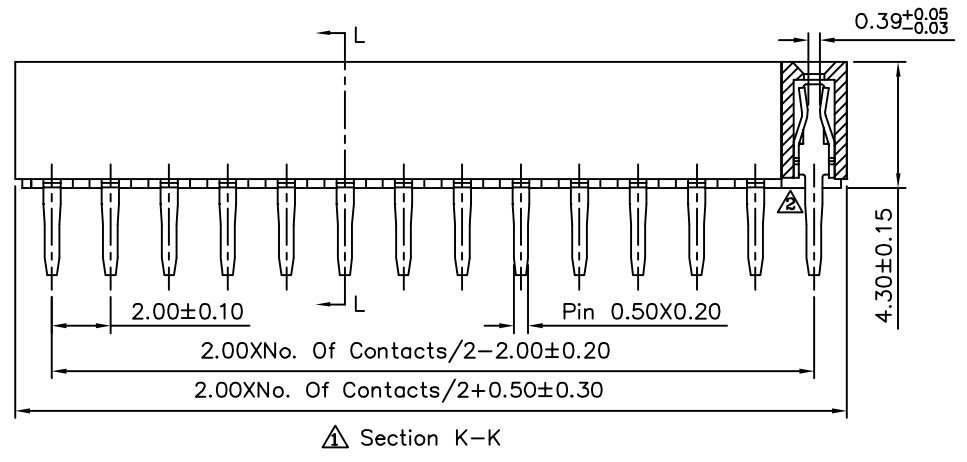


Recommended P.C.B. Layout(Top Side)  $\Delta$   
(PCB Board Tolerance $\pm$ 0.05)

**SPECIFICATION**  
 Current Rating:2.0 Amp  
 Dielectric Withstanding:500V AC/DC  
 Insulation Resistance:1000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Operating Temperature:-40°C~+105°C  
 Contact:Phosphor Bronze,Gold Plated Over Nickel  
 $\Delta$  Insulator:PA9T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

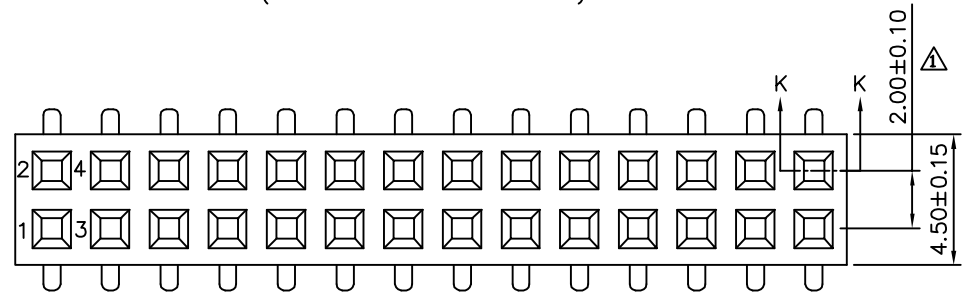

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm$ 0.40 .XX $\pm$ 0.25 .XXX $\pm$ 0.15 ANG. $\pm$ 3°	
12859		MEI			
		CHECKED BY	HZF		
		DRAWING BY	HAO		
SCALE	NONE	REV.	A2	UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
$\Delta$ A2		Modify Data	HZF	09/24/2015
$\Delta$ A1		Modify Data	HZF	10/08/2012
$\Delta$ A0		NEW RELEASE	HZF	01/04/2009