
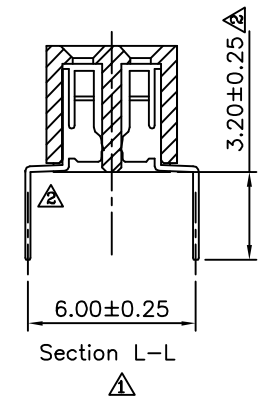
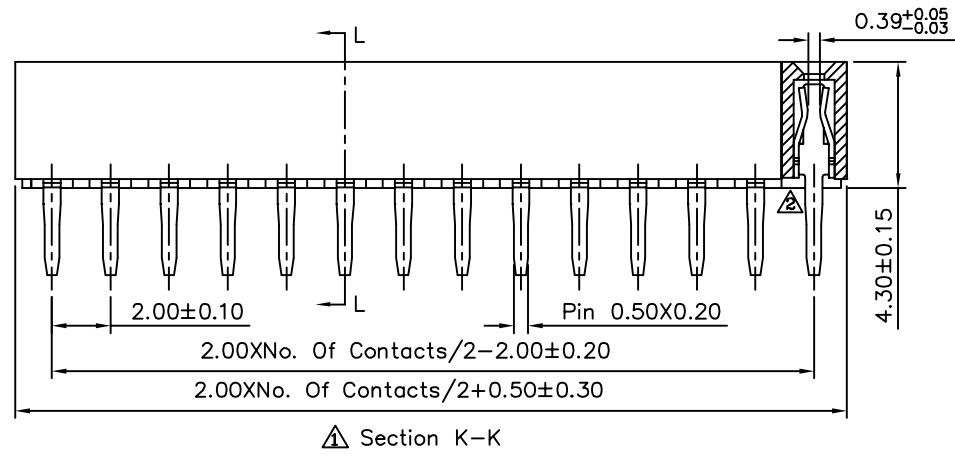


Recommended P.C.B. Layout(Top Side) Δ
(PCB Board Tolerance ± 0.05)

SPECIFICATION
 Current Rating:2.0 Amp
 Dielectric Withstanding:500V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operating Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 Δ Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

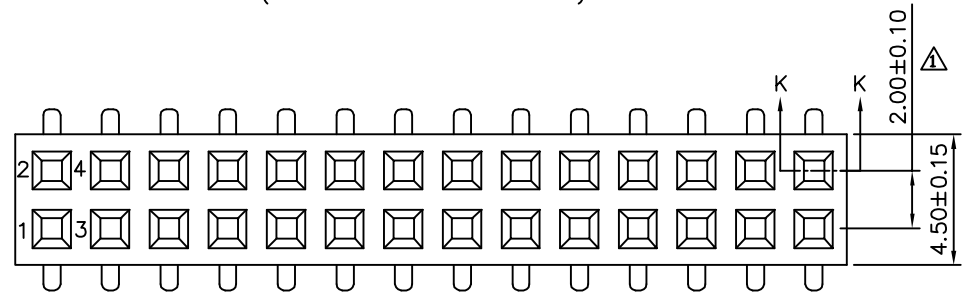

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.40 .XX ± 0.25 .XXX ± 0.15 ANG. $\pm 3^\circ$
12866		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
Δ A2		Modify Data	HZF	09/24/2015
Δ A1		Modify Data	HZF	10/08/2012
Δ A0		NEW RELEASE	HZF	01/04/2009