





Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

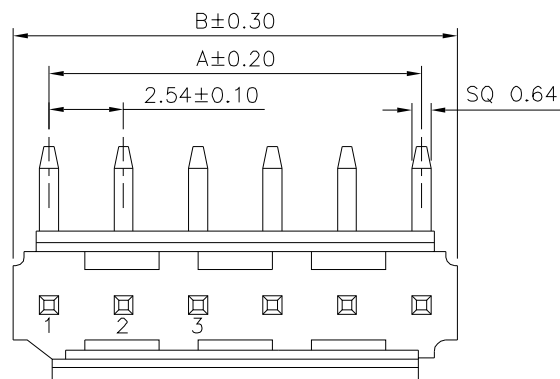

02~06 Pin

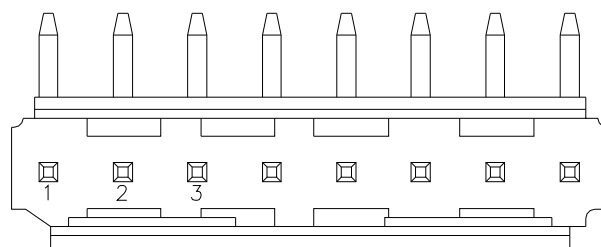

07~20 Pin

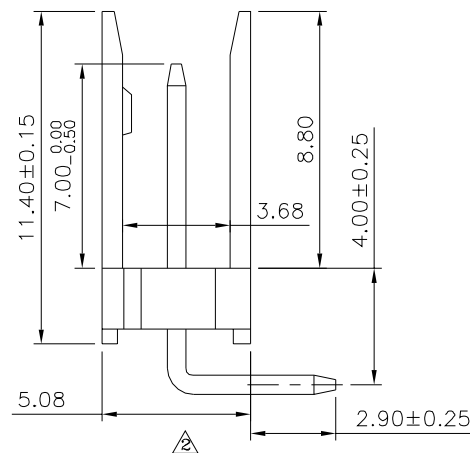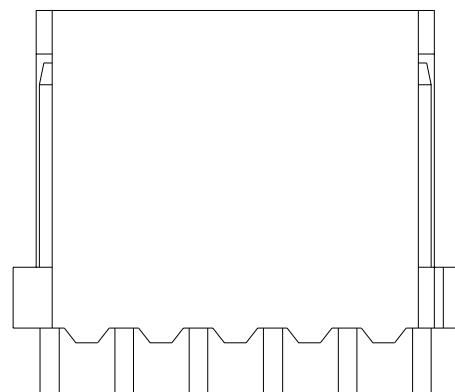

SPECIFICATION

- Current Rating:3.0A
- ⚠ Voltage Rating:250V AC/DC
- Withstand Voltage:1000V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-25°C~+85°C
- ⚠ Insulator:PA66+15%G.F.(UL94V-0),Black
- ⚠ Contact:Brass,Tin Plated Over Nickel
- RoHS Compliant

Pin	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 4

13166

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



4 A4

Modify Data

HZF

07/12/2024

3 A3

Modify Data

HZF

12/03/2014

2 A2

Modify Data

HZF

07/15/2014

1 A1

Modify Data

HZF

04/23/2013

0 A0

NEW RELEASE

HZF

08/01/2011

NO. REV.

REVISIONS

CHK

DATE