
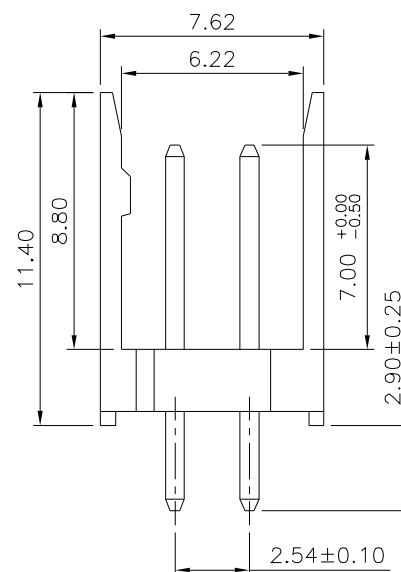
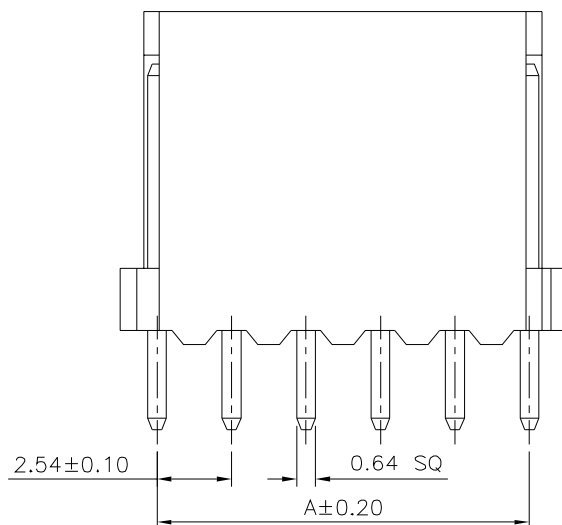
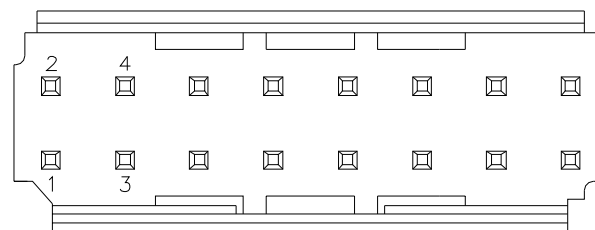


# SPECIFICATION

Current Rating:3A  
Voltage Rating:250V AC/DC  
Withstand Voltage:1000V AC/Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-25°C~+85°C  
Insulator:PA66+ 15%G.F.(UL94V-0),Black  
Contact:Brass,Tin Plated Over Nickel  
RoHS Compliant

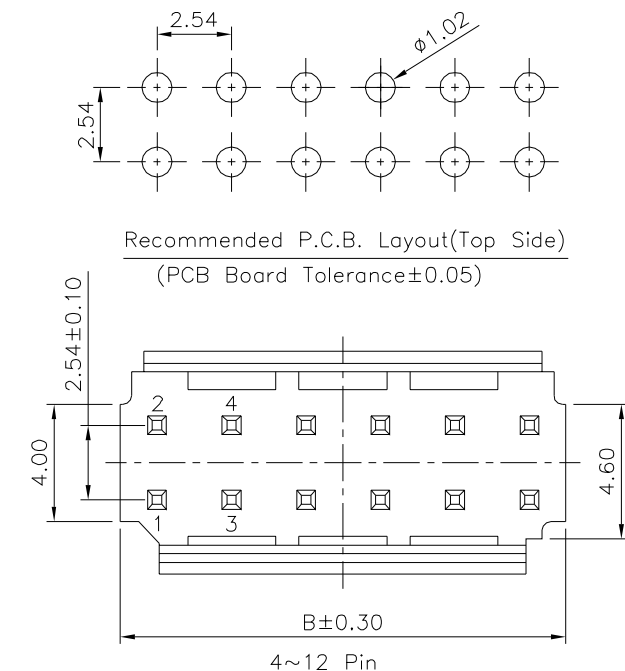

| Pin | A     | B     |
|-----|-------|-------|
| 04  | 2.54  | 5.08  |
| 06  | 5.08  | 7.62  |
| 08  | 7.62  | 10.16 |
| 10  | 10.16 | 12.70 |
| 12  | 12.70 | 15.24 |
| 16  | 17.78 | 20.32 |
| 20  | 22.86 | 25.40 |
| 24  | 27.94 | 30.48 |
| 26  | 30.48 | 33.02 |
| 30  | 35.56 | 38.10 |
| 34  | 40.64 | 43.18 |
| 36  | 43.18 | 45.72 |
| 40  | 48.26 | 50.80 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

13174

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG. ±3°


SCALE

NONE

REV.

A0

UNIT  
mm



△ A0

NEW RELEASE

HZF

04/27/2011

NO. REV.

REVISIONS

CHK

DATE