
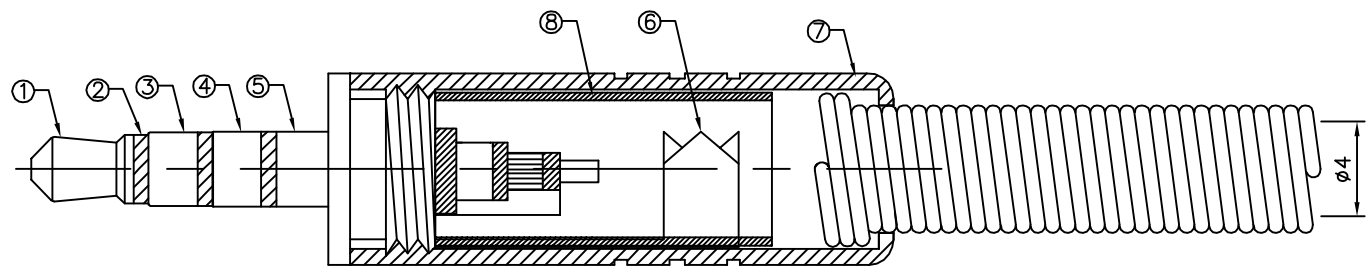


△ SPECIFICATION

Withstand Voltage: 250V AC/Minute
 Contact Resistance: 50 Milliohms Or Less
 Between Plug And Jack
 Insulation Resistance: 100 Megaohms Min.
 At 500V DC

RoHS Compliant

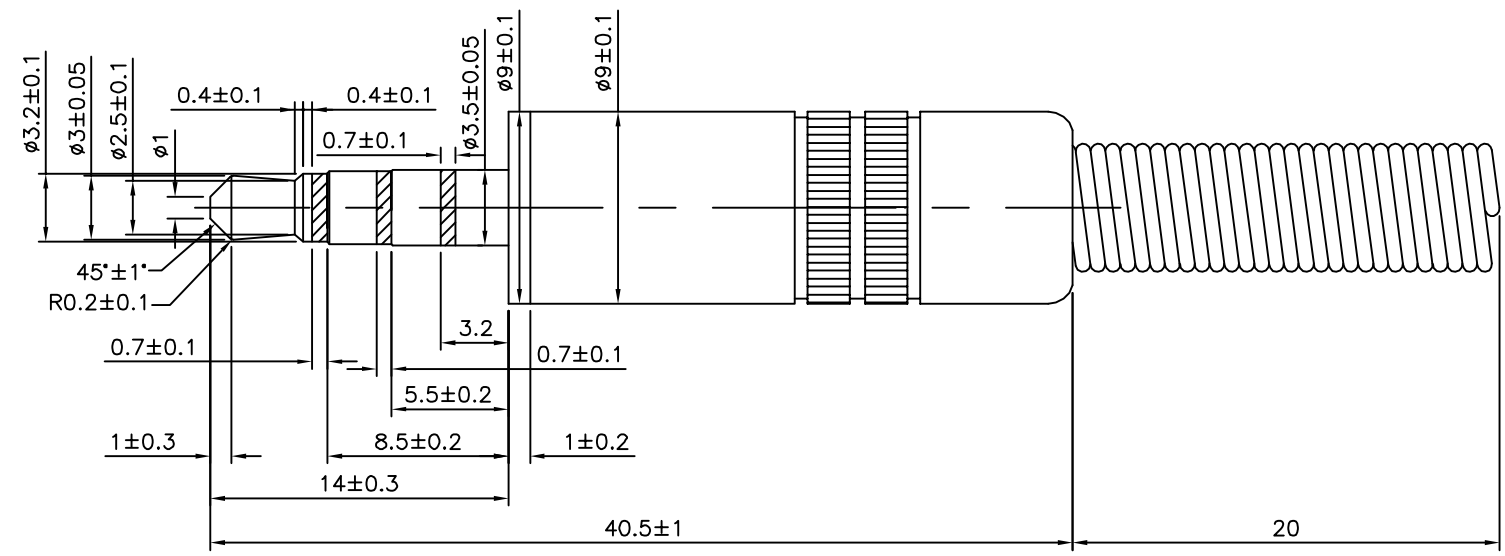

Item No.	Material	Remark
①	Brass	Nickel Plated
②	POM	Black
③	Brass	Nickel Plated
④	Brass	Nickel Plated
⑤	Brass	Nickel Plated
⑥	Brass	Nickel Plated
⑦	Brass	Nickel Plated
⑧	Plastic Tube	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
13382		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 0>1.0 ±0.1
 1.0>6.0 ±0.2
 6.0>12.0 ±0.3
 12.0>25.0 ±0.4
 25.0> ±0.5

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	07/21/2016
△ A1		Modify Data	HZF	12/10/2013
△ A0		NEW RELEASE	HZF	04/09/2013