


△ SPECIFICATION
 Rating:100V AC 1A Max.
 Contact Resistance:
 Pins:30 Milliohms Max.
 Shell:50 Milliohms Max.
 Insulation Resistance:
 100 Megaohms Min. At 500V DC
 Withstand Voltage:250V AC For 1 Minute
 Shield Cover:Zinc Alloy,Nickel Plated
 Bayonet Cap:Zinc Alloy,Nickel Plated
 Strain Boot:PVC
 Set Screw:Steel,Nickel Plated
 T-Holder:Steel,Nickel Plated
 △ Housing:ABS(UL94V-0)
 Terminals:Brass,Silver Plated
 RoHS Compliant

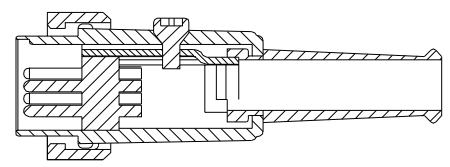

△ Section:A-A

△	13673 (3P)	13674 (4P)	13675 (5P)	13676 (5P,240°)	13677 (6P)	13678 (7P)	13679 (8P)	13680 (8P,262°)

4U CON 元化興業股份有限公司
 4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 ANG.
13678		EMILY		
		CHECKED BY	HZF	
		DRAWING BY	GAO	
SCALE	NONE	REV.	A3	UNIT mm

△ A3	Modify Data	HZF	08/08/2013
△ A2	Modify Data	HZF	11/23/2010
△ A1	Modify Data	HZF	09/07/2010
△ A0	NEW RELEASE		
NO. REV.	REVISIONS	CHK	DATE