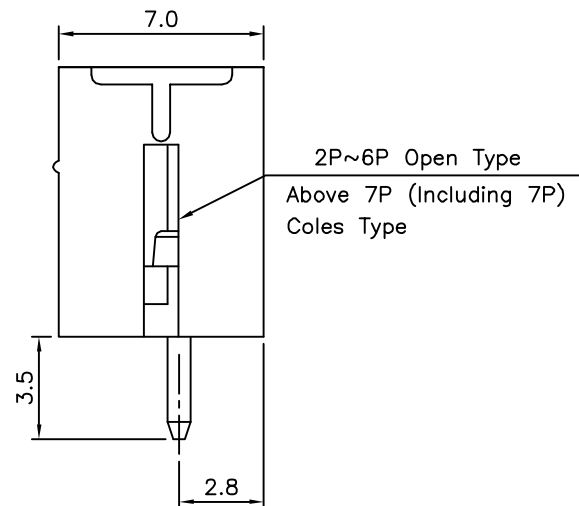
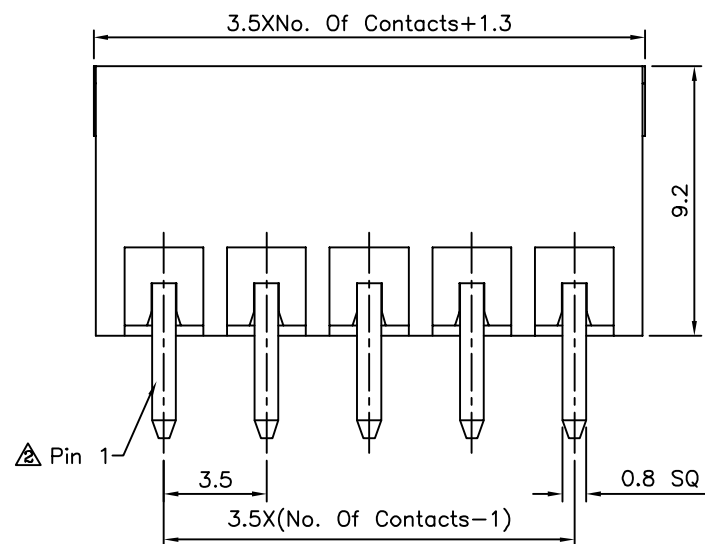


Recommended P.C.B. Layout

**△ SPECIFICATION**

Current Rating:12 Amp/Way Max.

Voltage Rating:300V AC

Withstanding Voltage:2500V AC For 1 Minute


Test Time=60 Sec/1 PCS

Operation Temperature:-40°C~+105°C

Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.Insulator Body(Housing):Polyamide+G.F.(UL94V-0)
,Green

Solder Pin:Copper Alloy,Tin Plated

RoHS Compliant

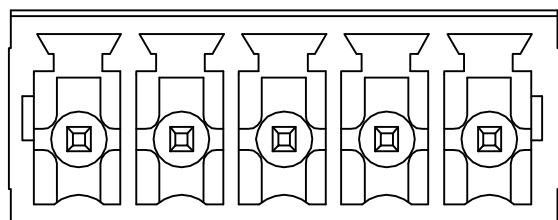**3/4****4UCON**元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13760

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT
mm

A4

Modify Data

HZF

05/28/2012

A3

Modify Data

HZF

11/23/2011

A2

Add Pin 1

HZF

11/22/2011

A1

Modify Data

HZF

10/14/2011

A0

NEW RELEASE

HZF

04/07/2009

NO. REV.

REVISIONS

CHK

DATE