

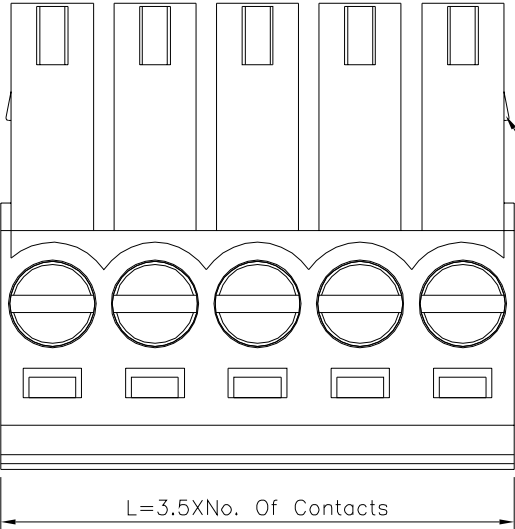


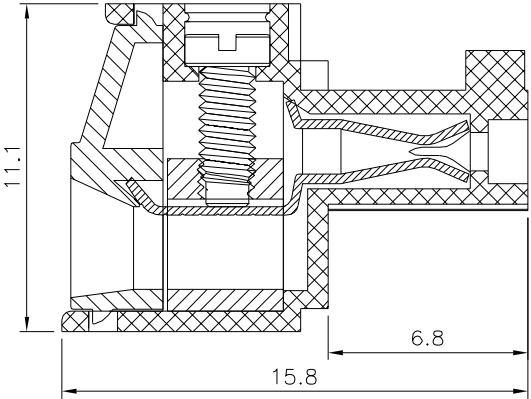

2P To 6P With Wedge,Above
7P Without Wedge(Including 7P)

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

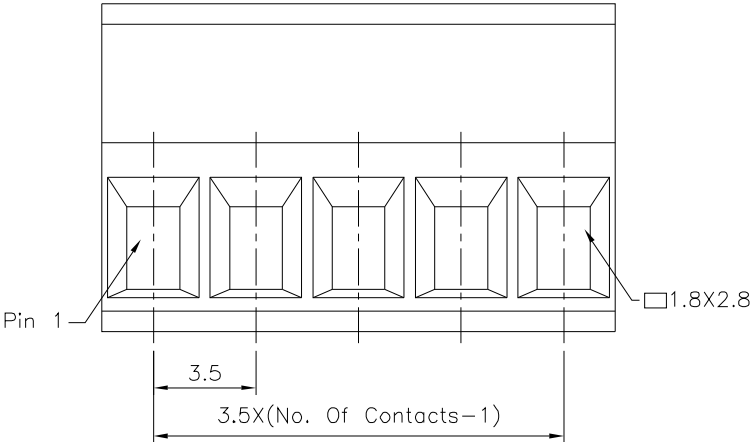

△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:12A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:1600V AC/Minute
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
Contact:Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 13764		APPROVED BY Jason Wu	
		CHECKED BY Leo Han	
		DRAWING BY Michelle Lee	
SCALE	NONE	REV.	B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.40 .XX ±0.30△ ANG. ±1°		UNIT	
		mm	

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	03/27/2026
△ B0		NEW RELEASE	HZF	10/04/2018