

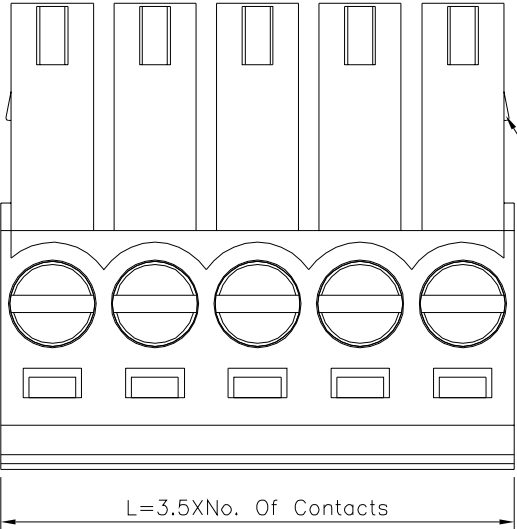


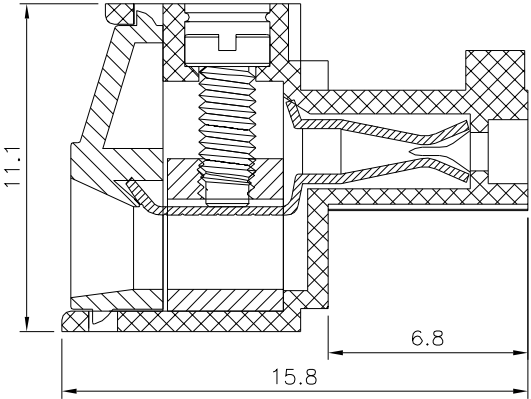

2P To 6P With Wedge,Above
7P Without Wedge(Including 7P)

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

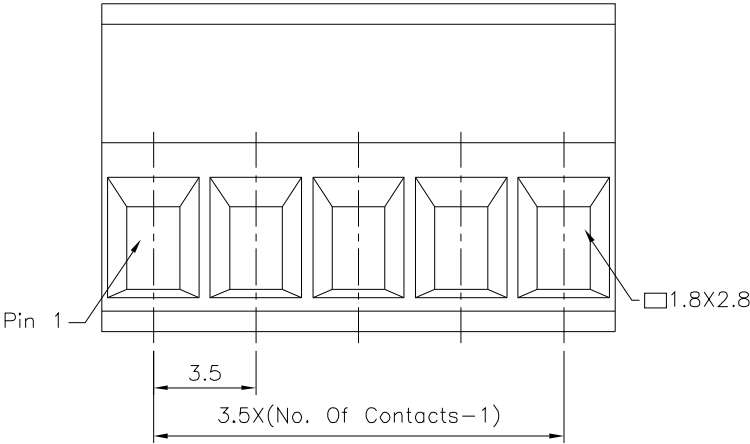

△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:12A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:1600V AC/Minute
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
Contact:Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13767

SCALE

NONE

REV.

B1

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


X. ±0.50

.X ±0.40

.XX ±0.30△

ANG. ±1°

UNIT
mm



△ B1

Modify Data

HZF

03/27/2026

△ B0

NEW RELEASE

HZF

10/04/2018

NO. REV.

REVISIONS

CHK

DATE