File No.	182ML22237	SHEET	1 /1

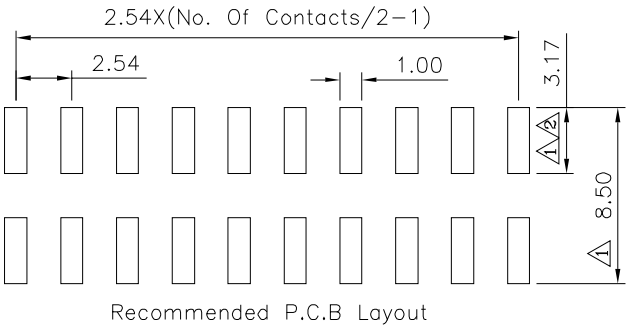

Recommended P.C.B Layout

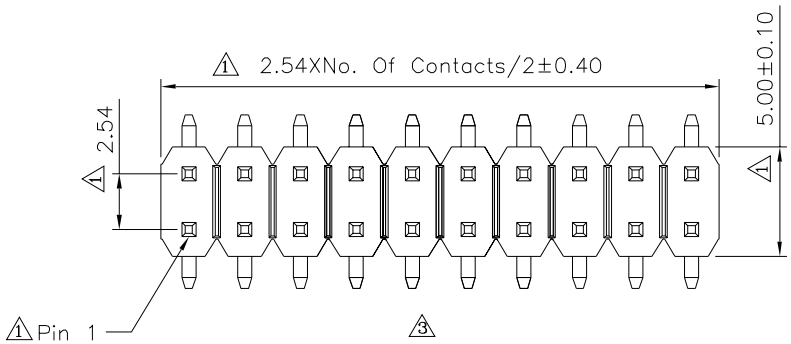

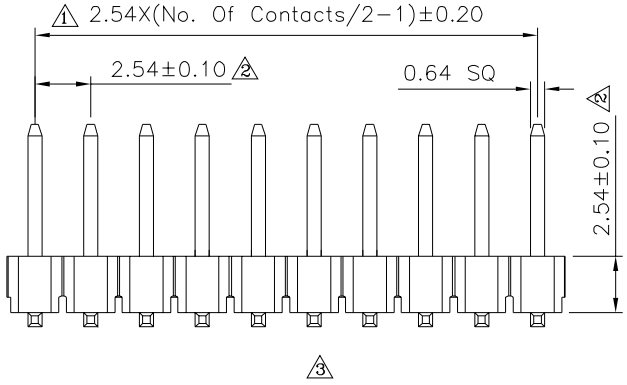



3 1 SPECIFICATION
Current:3A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1000V AC/Minute
Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:04~80 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
14112	MEI	3 .X ±0.38
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY WSS	.XXX ±0.05
SCALE NONE	REV. A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	12/22/2022
2	A2	Modify Data	HZF	08/31/2011
1	A1	Modify Data	HZF	11/25/2009
0	A0	NEW RELEASE	SHIN	03/13/2006