

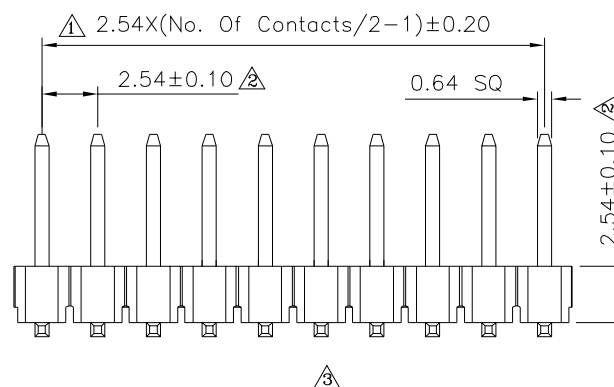
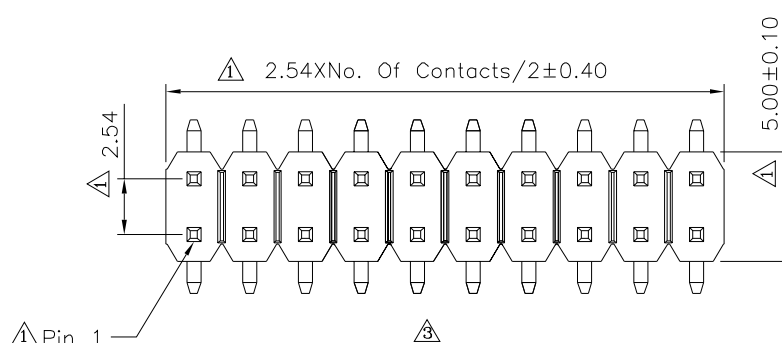


**△△ SPECIFICATION**  
 Current:3A  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Withstanding Voltage:1000V AC/Minute  
 Operation Temperature:-40°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~80 Contacts  
 RoHS Compliant

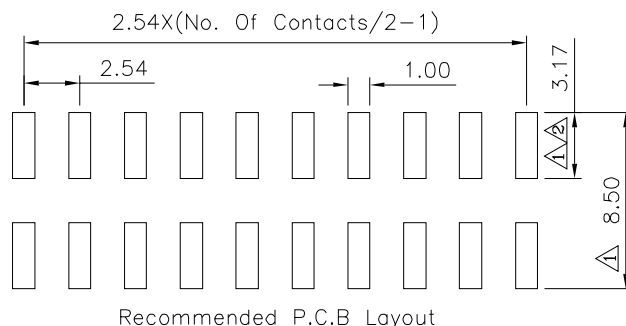

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

14121

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


WSS

REV.

A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 △ .X ±0.38  
 .XX ±0.25  
 .XXX ±0.05

UNIT  
 mm



| NO. | REV. | REVISIONS   | CHK  | DATE       |
|-----|------|-------------|------|------------|
| △3  | A3   | Modify Data | HZF  | 12/22/2022 |
| △2  | A2   | Modify Data | HZF  | 08/31/2011 |
| △1  | A1   | Modify Data | HZF  | 11/25/2009 |
| △0  | A0   | NEW RELEASE | SHIN | 03/13/2006 |