

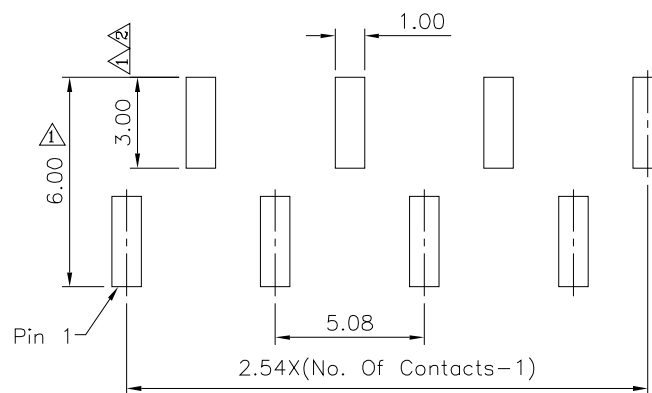
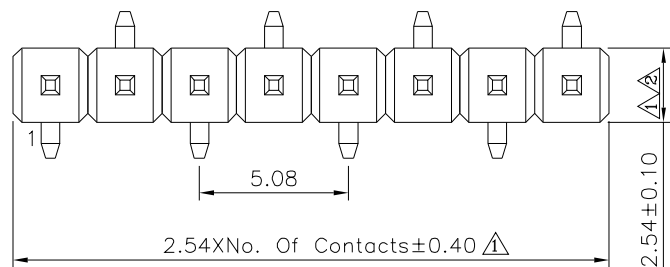


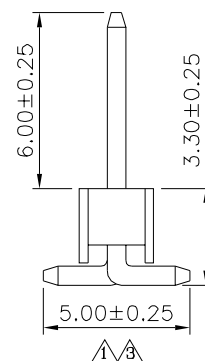

Recommended P.C.B Layout

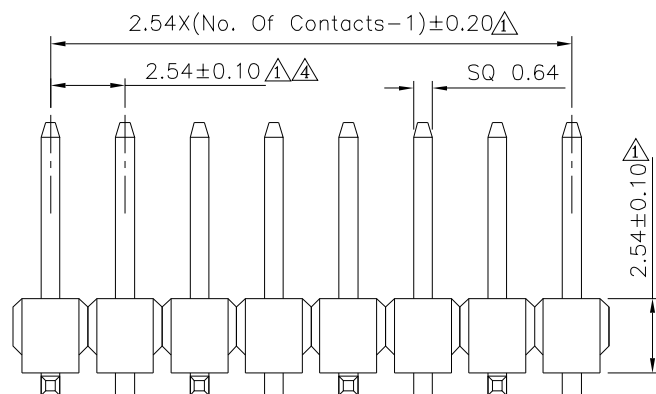

1 SPECIFICATION

Current Rating:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant



DRAWING No. 4

14148

SCALE	NONE
-------	------

NONE

APPROVED BY	MEI
-------------	-----

CHECKED BY	HZF
------------	-----

DRAWING BY CYP

REV.	A4
------	----

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X	± 0.38
.XX	± 0.25
ANG.	$\pm 5^\circ$

UNIT	
mm	

	$\triangle_4$	A4
--	---------------	----

Modify Data

HZF

02/21/2019

	A3
---	----

Modify Data

HZF

12/15/2012

	A2
---	----

Modify Data

HZF

07/19/2010

	A1
	

Modify Data

01/04/2010	
------------	--

NO.	REV.
-----	------

REVISIONS

CHK

01/18/2008
DATE