

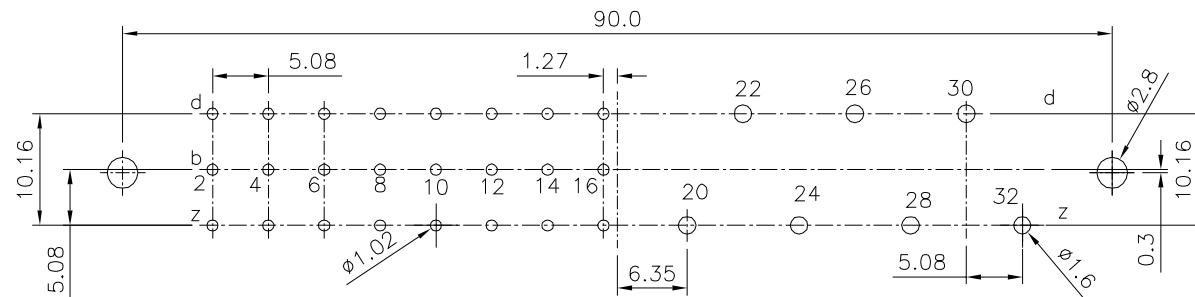
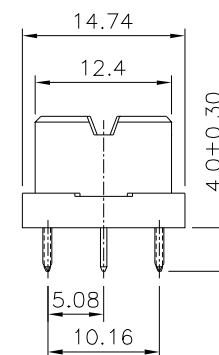


SPECIFICATION

Current Rating:F Type 5.6 Amp/H Type 15 Amp
 Withstanding Voltage:F Type AC 1550V/H Type AC 3100V
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Contact Resistance:F Type 15 Milliohms Max./
 H Type 8 Milliohms Max. At DC 100mA
 Operation Temperature:-55°C~+125°C
 Housing:PBT+G.F.(UL94V-0)
 Contact:Brass,Z20~Z32:Tin Pated Over Ncikel
 Other:Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

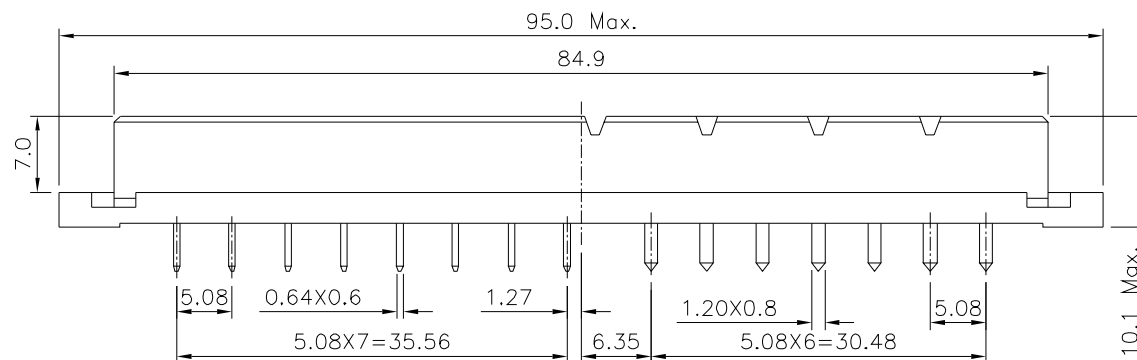

Recommended P.C.B. Layout
 (PCB Board Tolerance±0.05)

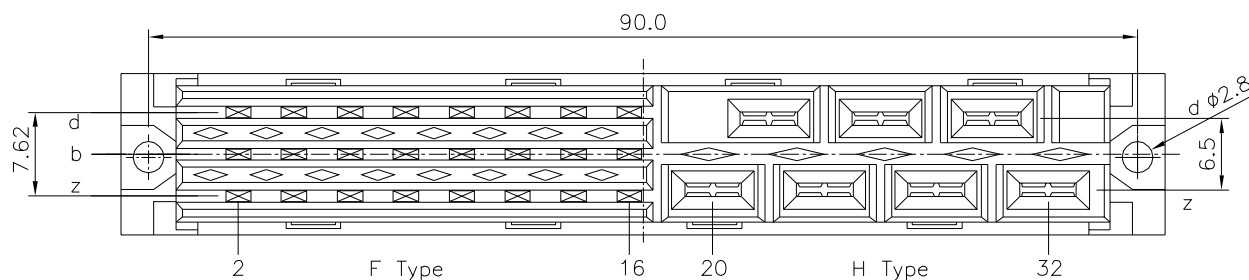

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14531

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

BO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.15

UNIT
 mm



NO. REV.

BO NEW RELEASE

REVISIONS

CHK

DATE

△ BO

NEW RELEASE

HZF

07/04/2023