

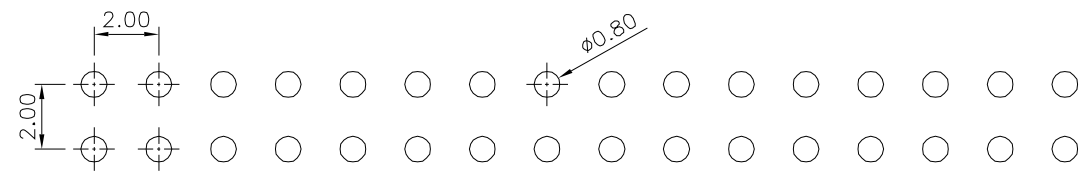


△ SPECIFICATION


Current Rating:1.5 Amp/Contact  
 Withstand Voltage:450V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

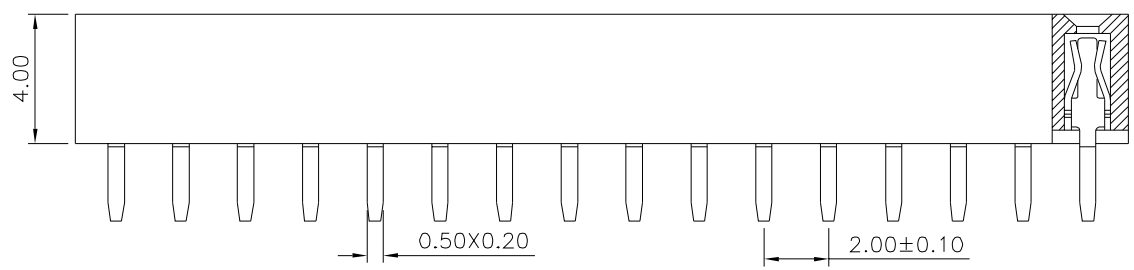

Recommended P.C.B. Layout

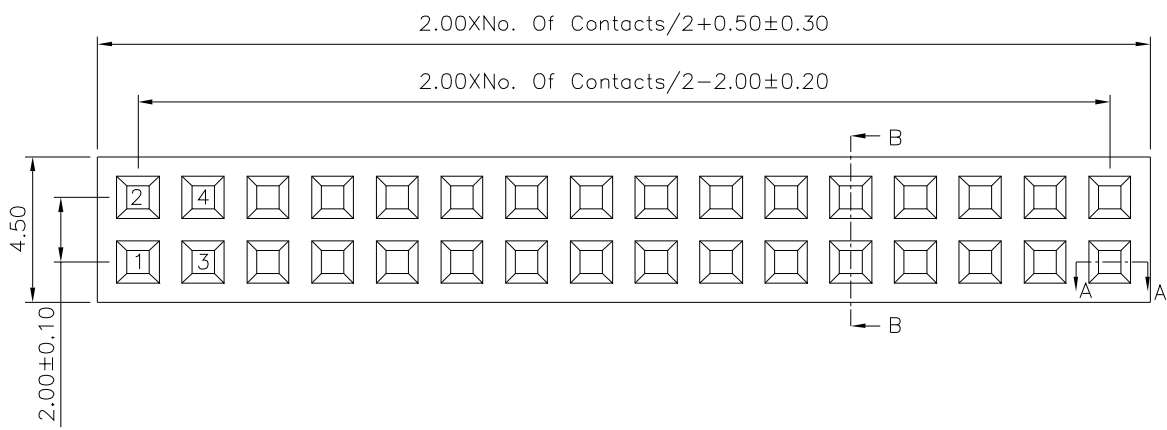

Section A-A



Section B-B

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
14842		MEI		
		CHECKED BY HZF		
		DRAWING BY SONG		NO. REV.
SCALE	NONE	REV.	A1	UNIT mm
				NO. REV.
				REVISIONS
				CHK
				DATE

△ A1	Modify Data	HZF	10/16/2013
△ A0	NEW RELEASE	HZF	11/30/2011