
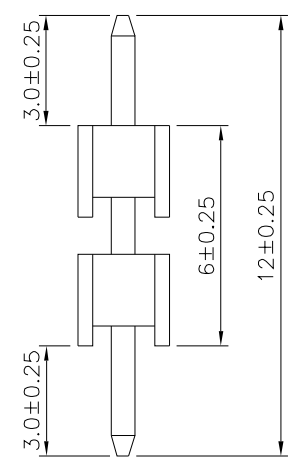
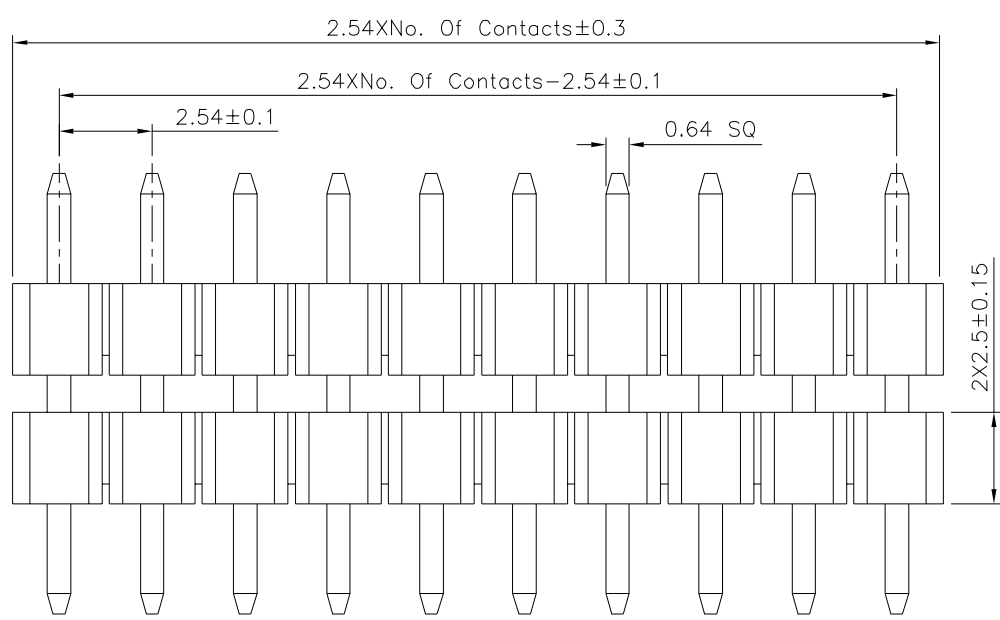


**SPECIFICATION**

Current Rating:3 Amps  
 Withstanding Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

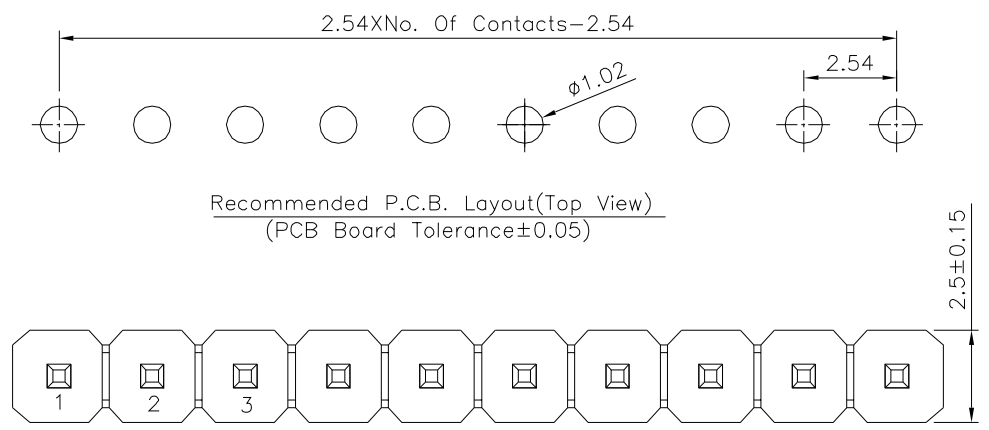

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
14846		EMILY	
		CHECKED BY	
		HZF	
DRAWING BY		YBL	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE							
X.	±0.25	X.*	±2°				
.X	±0.20	.X*	±1.5°				
.XX	±0.15	.XX*	±1°				
.XXX	±0.10	.XXX*	±0.5°				
UNIT	mm						
NO.	REV.	REVISIONS	CHK	DATE			
△ A0		NEW RELEASE	HZF	07/10/2013			