

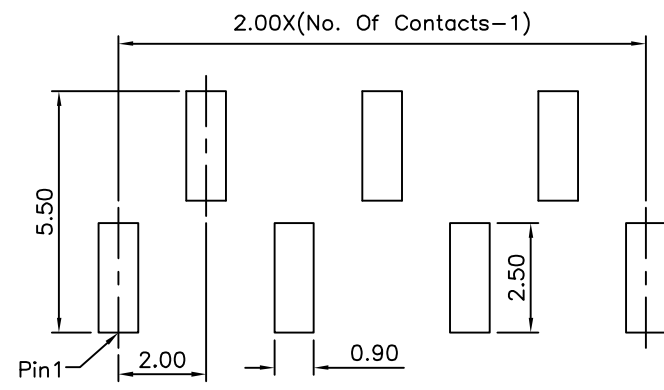
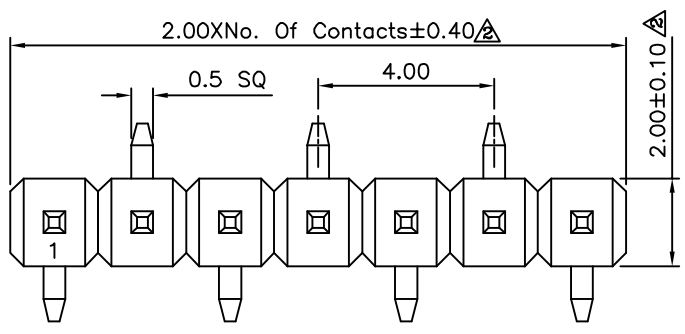


△△ SPECIFICATION

Current:1A
 Dielectric Strength:1000V AC Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

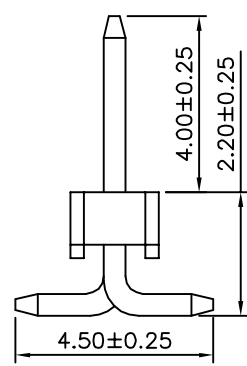

△ Recommended P.C.B. Layout

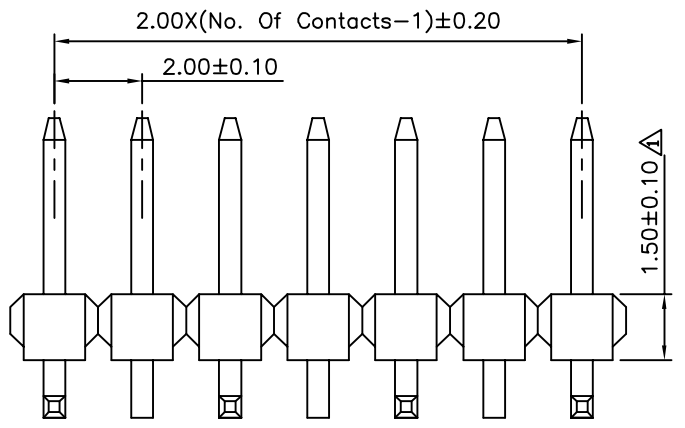

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°				
15009		EMILY			△ A3	Modify Data	HZF	01/14/2014
		CHECKED BY			△ A2	Modify Data	HZF	12/18/2012
		DRAWING BY		△ A1	Modify Data	HZF	09/03/2009	
SCALE		REV.		△ A0	NEW RELEASE	SHIN	04/15/2007	
NONE		A3		NO. REV.	REVISIONS	CHK	DATE	