File No. 182EA14226 SHEET 1/1

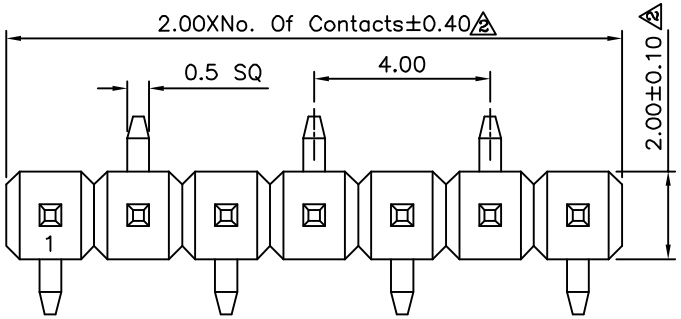

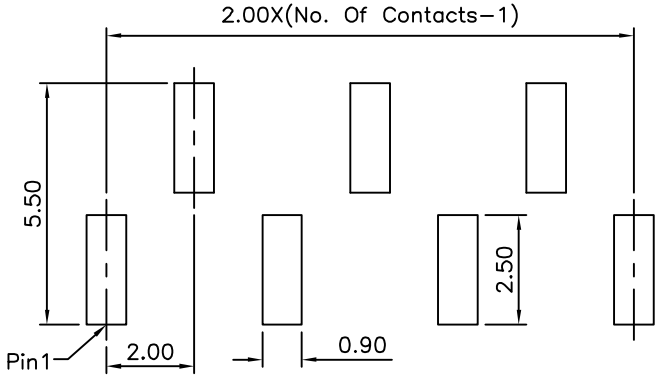

1 Recommended P.C.B. Layout

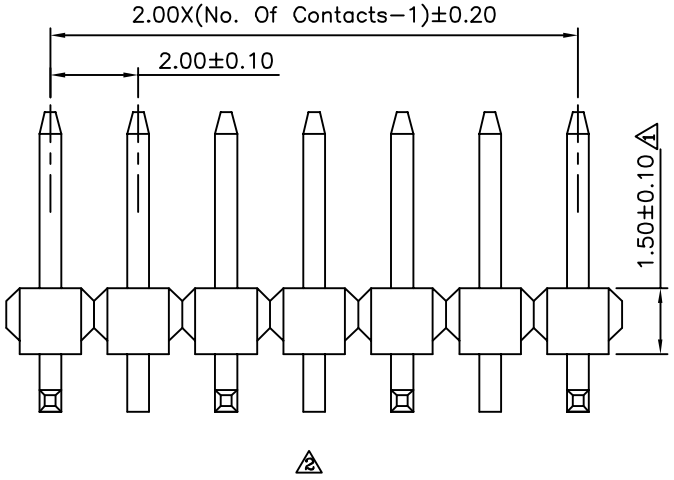

2

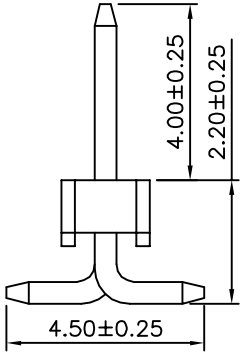

1 2

2 1 SPECIFICATION

Current:1A
Dielectric Strength:1000V AC Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:−55°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Copper Alloys,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	15014	
APPROVED BY	EMILY	
CHECKED BY	HZF	
DRAWING BY	YBL	
SCALE	NONE	
REV.	A3	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	.X ±0.38 .XX ±0.25 ANG. ±5°	
UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	01/14/2014
2	A2	Modify Data	HZF	12/18/2012
1	A1	Modify Data	HZF	09/03/2009
0	A0	NEW RELEASE	SHIN	04/15/2007